



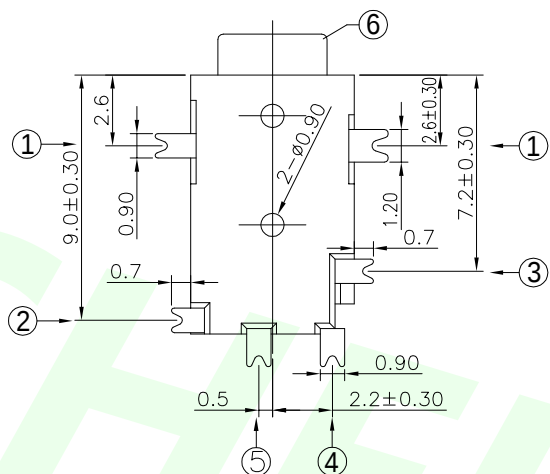


SCHEMATIC


CPJ-S2024	CPJ-S2024-1	CPJ-S2024-2	CPJ-S2024-3

SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.05\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

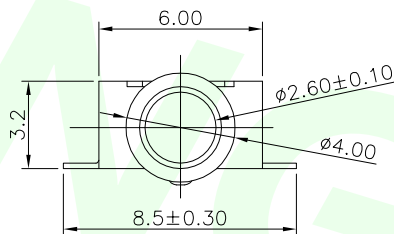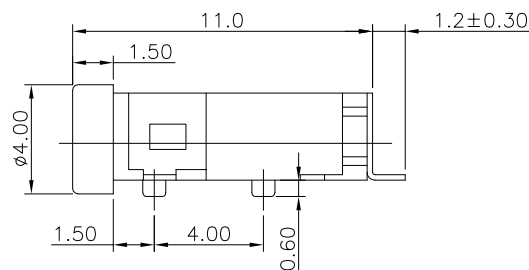

P.C.B LAYOUT
TOP VIEW

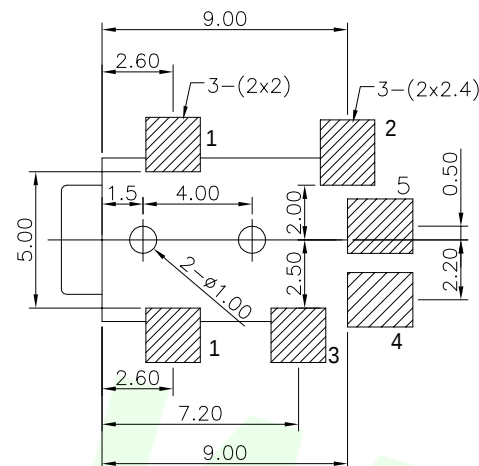

所有材料為
"環保材料"

2013.11.07

RoHS

6	HOUSING	1	PA9T	—	—
5	5#CONTACT FOOT	1	BRONZE	—	Ag-Plating
4	4#CONTACT FOOT	1	BRONZE	—	Ag-Plating
3	3#CONTACT FOOT	1	SUS301	—	Ag-Plating
2	2#CONTACT FOOT	1	SUS301	—	Ag-Plating
1	1#CONTACT FOOT	1	SUS301	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

PHONE JACK

PART NO: CPJ-S2024-X

DWG NO(圖號): PJ-S2024

DRAWN(製圖):

MIMI

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

X ±0.50 Angle

XX ±0.30 X '± 3'

XXX ±0.20 X.X '± 2'

XXX ±0.10 X.XX '± 1'

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

DATE

2013.11.07