



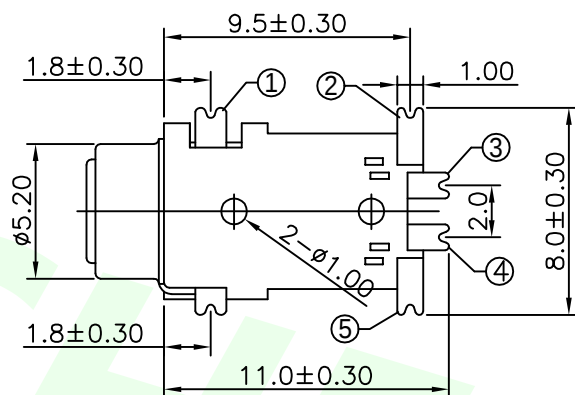


SCHEMATIC





SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.05\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. Life test: 5,000 cycles.

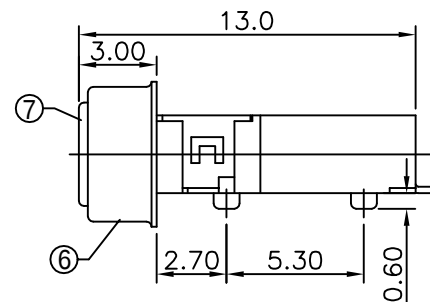

PLUG

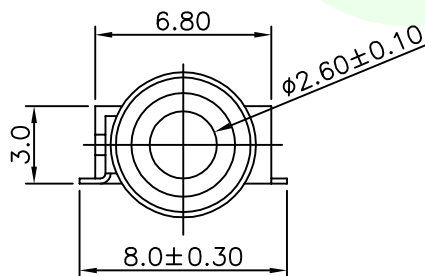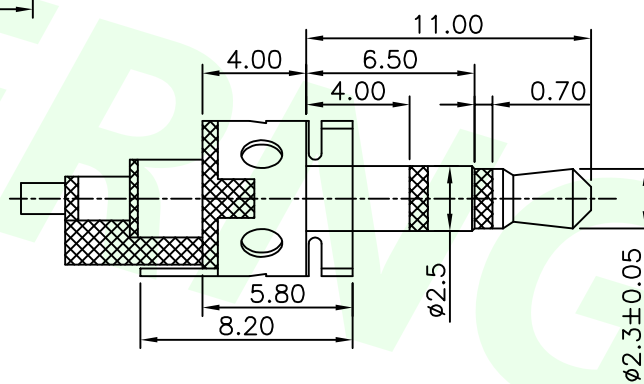


所有材料為
"環保材料"

2013.11.07

RoHS

P.C.B LAYOUT
TOP VIEW

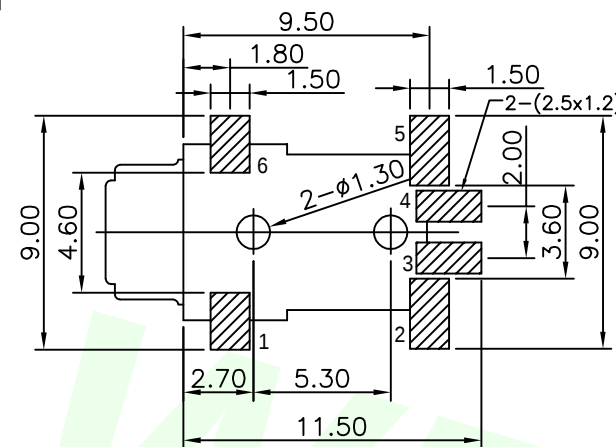

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
7	HOUSING	1	PA9T		
6	6#CONTACT FOOT	1	BRASS		Au-Plating
5	5#CONTACT FOOT	1	BRONZE		Ag-Plating
4	4#CONTACT FOOT	1	BRASS		Ag-Plating
3	3#CONTACT FOOT	1	BRASS		Ag-Plating
2	2#CONTACT FOOT	1	BRONZE		Ag-Plating
1	1#CONTACT FOOT	1	SUS301		Ag-Plating



承洧科技股份有限公司
Cherng Weei Technology Corp.

DESCRIPTION(內容):

PHONE JACK

PART NO: CPJ-S2026-X

DWG NO(圖號): PJ-S2026

DRAWN(製圖):

MIMI

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

X ± 0.50 Angle

XX ± 0.30 X '± 3'

XXX ± 0.20 X.X '± 2'

XXX ± 0.10 X.XX '± 1'

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

DATE

2013.11.07