
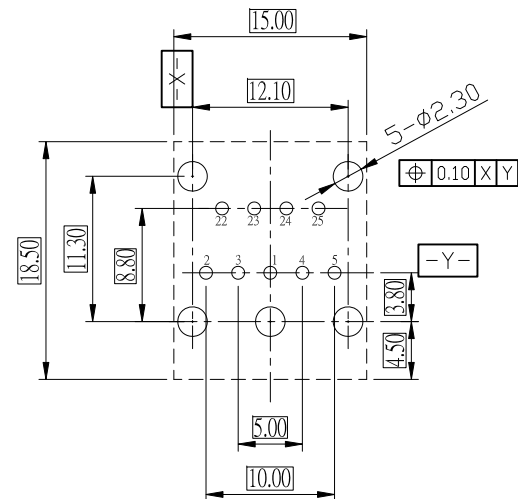

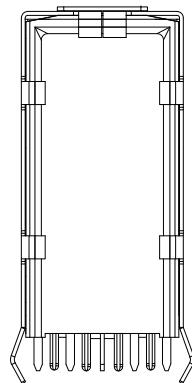
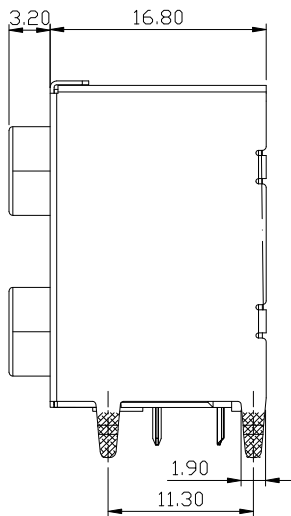
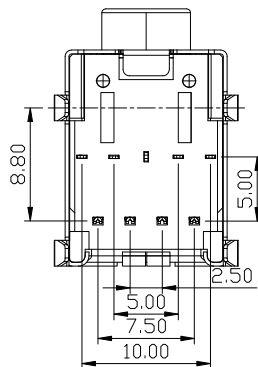
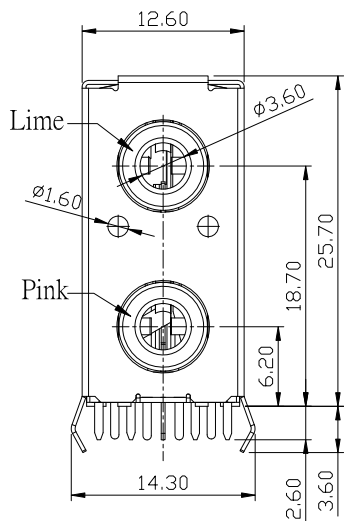




RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE:±0.05

13	Plastic Bushing	PA66+15%G.F, UL94V-0		1
12	Housing	PBT+30%G.F, UL94V-0	Black	1
11	Cover	LCP+30%G.F, UL94V-0	Black	1
10	Shield	SPCC	Bright 100u" Tin Plated Cover 50u" Nickel Plated	1
9	2-Tip Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
8	2-TS Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
7	2-RS Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
6	2-Ring Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
5	Tip Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
4	TS Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
3	RS Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
2	Ring Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
1	Sleeve Terminal	Copper Alloy	Au1-3u" & Tin Plated & Nickel Plated	1
ITEM	NAME	MATERIAL	FINISH	SUM