



Panel hole dimensions

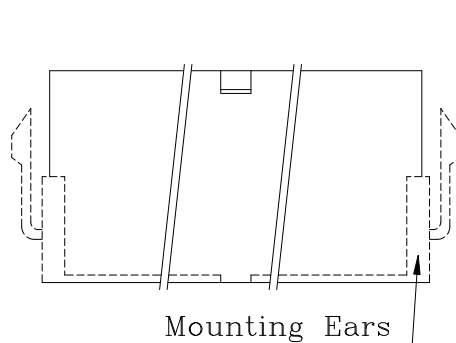

Mounting Ears



Specifications:

- Material: Nylon 66 UL 94V-2
- Voltage Rating: 600V
- Current Rating: 9A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000M Ω min.
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.



Dimensional & Ordering Information:

Circuits	Part No		Dimensions mm		
	Without Mounting Ears	With Mounting Ears	A	B	C
02	CR-H423F-2X01	CR-H423F-2X01Y		5.40	10.80
04	CR-H423F-2X02	CR-H423F-2X02Y	4.20	9.60	15.00
06	CR-H423F-2X03	CR-H423F-2X03Y	8.40	13.80	19.20
08	CR-H423F-2X04	CR-H423F-2X04Y	12.60	18.00	23.40
10	CR-H423F-2X05	CR-H423F-2X05Y	16.80	22.20	27.60
12	CR-H423F-2X06	CR-H423F-2X06Y	21.00	26.40	31.80
14	CR-H423F-2X07	CR-H423F-2X07Y	25.20	30.60	36.00
16	CR-H423F-2X08	CR-H423F-2X08Y	29.40	34.80	40.20
18	CR-H423F-2X09	CR-H423F-2X09Y	33.60	39.00	44.40
20	CR-H423F-2X10	CR-H423F-2X10Y	37.80	43.20	48.60
22	CR-H423F-2X11	CR-H423F-2X11Y	42.00	47.40	52.80
24	CR-H423F-2X12	CR-H423F-2X12Y	46.20	51.60	57.00



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

4.2mm (.165") Mini-Fit Power
Connector / Plug

PART NO: CR-H423F-2xXX
(料號) CR-H423F-2xXX

DWG NO(圖號): 4202-H-XXF
4202-H-XX

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.000 : ± 0.08
.00 : ± 0.13
.0 : ± 0.25

SCALE(比例):

FREE



REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

DESCRIPTION

環保料 (加入RoHS章)

修改接腳阻抗單位

2008年圖面版本更新&補充無耳料號

2014年8月料號P數編碼統一兩碼

更換圖面印章

DATE

2006.04.27

2006.11.20

2008.04.23

2015.01.26

2018.03.04