

A

B

C

D



E

Specifications:

- Material: Nylon 66 UL 94V-2
- Voltage Rating: 600V
- Current Rating: 9A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000M Ω min.
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.



C±0.25

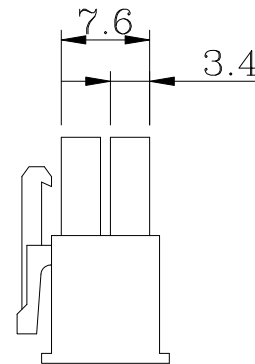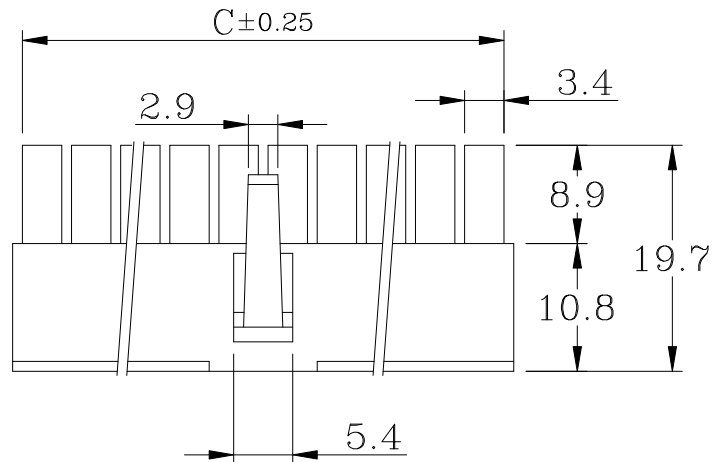

Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm		
		A	B	C
02	CR-H423M-2X01		5.50	3.50
04	CR-H423M-2X02	4.20	9.70	7.60
06	CR-H423M-2X03	8.40	13.90	11.80
08	CR-H423M-2X04	12.60	18.10	16.00
10	CR-H423M-2X05	16.80	22.30	20.20
12	CR-H423M-2X06	21.00	26.50	24.40
14	CR-H423M-2X07	25.20	30.70	28.60
16	CR-H423M-2X08	29.40	34.90	32.80
18	CR-H423M-2X09	33.60	39.10	37.00
20	CR-H423M-2X10	37.80	43.30	41.20
22	CR-H423M-2X11	42.00	47.50	45.40
24	CR-H423M-2X12	46.20	51.70	49.60



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

4.2mm (.165") Mini-Fit Power
Connector(RoHS)

PART NO:
(料號) CR-H423M-2xXX

DWG NO(圖號): 4201-H

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.000 : ±0.08

.00 : ±0.13

.0 : ±0.25

SCALE(比例):

FREE



REV:

R5

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

R5

DESCRIPTION

環保料
加入RoHS章
修改接觸阻單位
2008年圖面版本更新

2014年8月料號P數編碼統一兩碼

新增A尺寸

DATE

2006.03.21

2006.11.08

2006.11.20

2008.04.23

2015.01.26

2015.08.18

A

B

C

D

E