

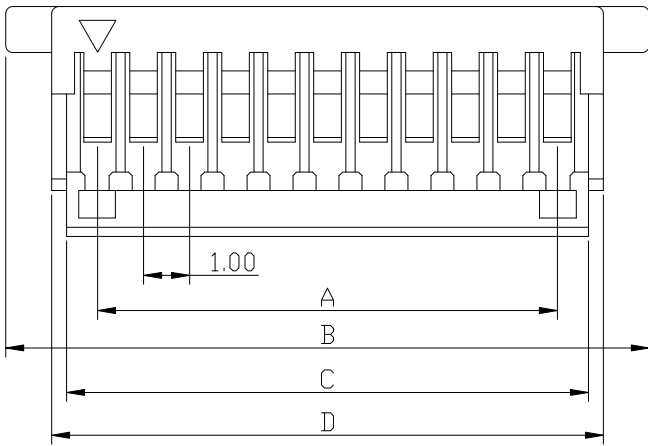


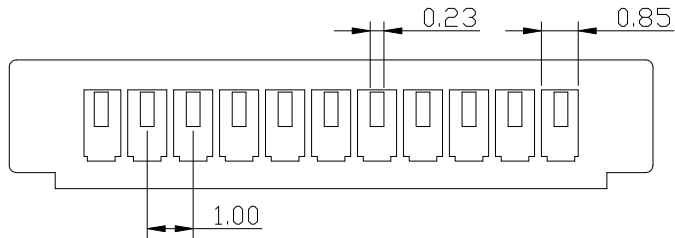

B尺寸公差如下:
2P~10P $\pm 0.10\text{mm}$
11P~20P $\pm 0.20\text{mm}$



SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100M Ω / min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20m Ω / max.

Material

Material: PBT, UL94V-0

Poles	Dimension mm				Note.
	A	B	C	D	
02	1.0	5.0	2.37	3.00	
03	2.0	6.0	3.37	4.00	
04	3.0	7.0	4.37	5.00	
05	4.0	8.0	5.37	6.00	
06	5.0	9.0	6.37	7.00	
07	6.0	10.0	7.37	8.00	
08	7.0	11.0	8.37	9.00	
09	8.0	12.0	9.37	10.00	
10	9.0	13.0	10.37	11.00	
11	10.0	14.0	11.37	12.00	
12	11.0	15.0	12.37	13.00	
13	12.0	16.0	13.37	14.00	
14	13.0	17.0	14.37	15.00	
15	14.0	18.0	15.37	16.00	
16	15.0	19.0	16.37	17.00	
17	16.0	20.0	17.37	18.00	
18	17.0	21.0	18.37	19.00	
19	18.0	22.0	19.37	20.00	
20	19.0	23.0	20.37	21.00	



承洧科技股份有限公司
Cherrng Wee Technology Corp.

DESCRIPTION(內容):

1.0mm Wire-to-Board
Housing(RoHS)

PART NO:
(料號) CSH-H10-XX

DWG NO(圖號): 1000-XX

DRAWN(製圖):

Shih

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

X.XX $\pm$ 0.1
X.X $\pm$ 0.25

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

修改接觸阻抗單位

2014年料號Pin數編碼統一

DATE

2006.08.09

2007.04.04

2014.10.09