

A

B

C

D

E

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -20°C ~ +85°C




Insulation Resistance: 100M Ω / min.

Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20m Ω / max.

Material

Material: Nylon66, UL94V-0

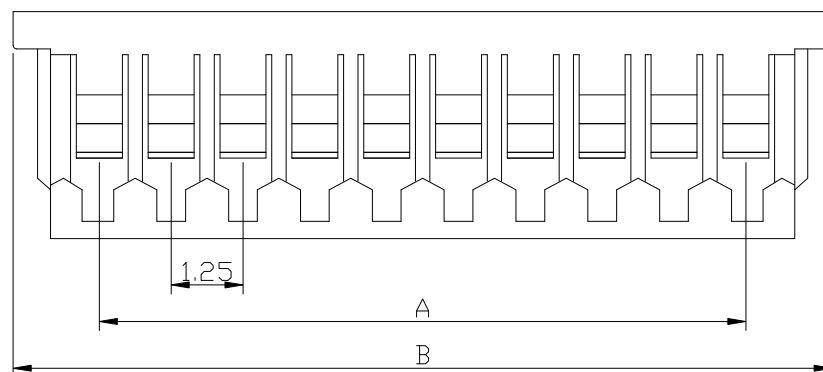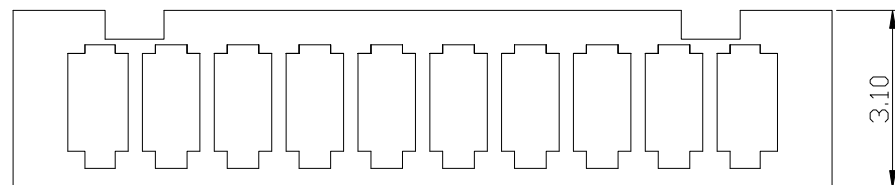

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
02	1.25(0.049)	4.25(0.167)	CX-H125-02	
03	2.50(0.098)	5.50(0.217)	CX-H125-03	
04	3.75(0.148)	6.75(0.266)	CX-H125-04	
05	5.00(0.197)	8.00(0.315)	CX-H125-05	
06	6.25(0.246)	9.25(0.364)	CX-H125-06	
07	7.50(0.295)	10.50(0.413)	CX-H125-07	
08	8.75(0.344)	11.75(0.463)	CX-H125-08	
09	10.00(0.394)	13.00(0.512)	CX-H125-09	
10	11.25(0.443)	14.25(0.561)	CX-H125-10	
11	12.50(0.492)	15.50(0.610)	CX-H125-11	
12	13.75(0.541)	16.75(0.659)	CX-H125-12	
13	15.00(0.591)	18.00(0.709)	CX-H125-13	
14	16.25(0.640)	19.25(0.758)	CX-H125-14	
15	17.50(0.689)	20.50(0.807)	CX-H125-15	



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

1.25mm Wire-to-Board Housing
(RoHS)

PART NO:
(料 號) **CX-H125-XX**

DWG NO(圖號): **1250-XX**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX $\pm$ 0.15X.X $\pm$ 0.25

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2015.07.09

A

B

C

D

E