

A

B

C

D

E

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100M Ω / min.


Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20m Ω / max.


Material

Terminal maetrial: Phosphor Bronze/ Tin-plated


Wire Range: 28 to 32AWG




Section A-A



Section B-B



Section C-C

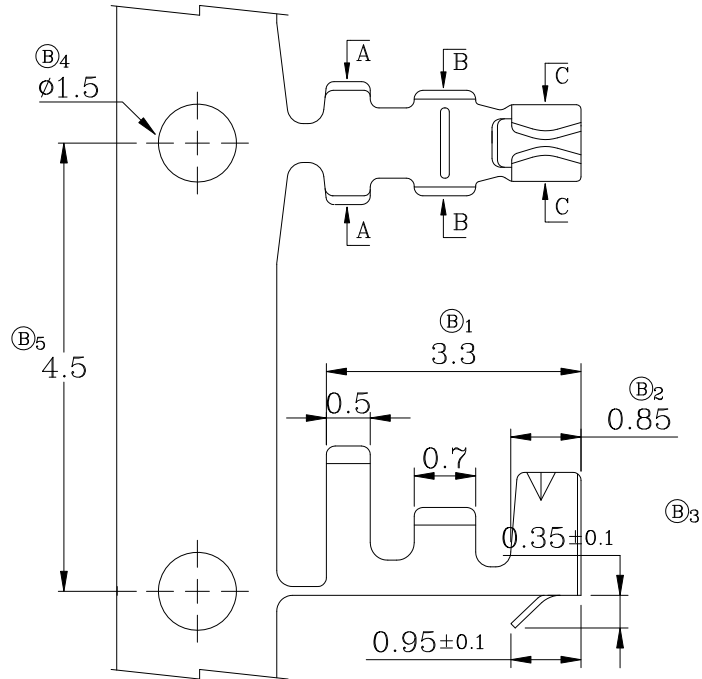

承洧科技股份有限公司
Cherng Weei Technology Corp.

DESCRIPTION(内容):

1.25mm Terminal(RoHS)

PART NO:
(料 號) CX-T125F

DWG NO(圖號): 1250-T

DRAWN(製圖):
mimiCHECKED(確認):
MANDYAPPROVAL(核准):
JOHNNYGENERAL TOLERANCE:
(公差)X.XX $\pm$ 0.1
X.X $\pm$ 0.5SCALE(比例):
FREEREV:
R1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

變更料號: C-T125F→CX-T125F

DATE

2006.08.09

2007.01.08

A

B

C

D

E