
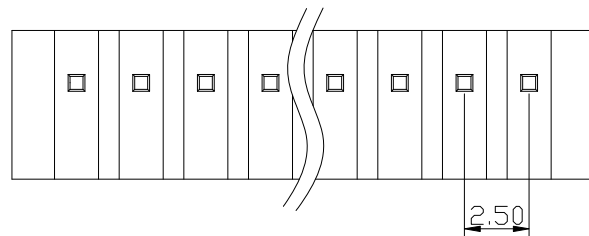
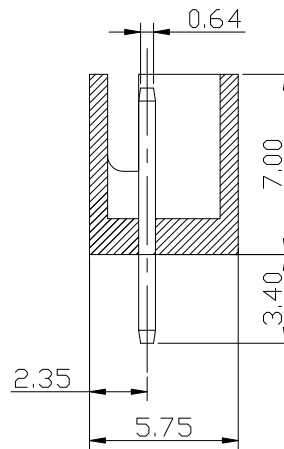


RECOMMENDED P.C.BOARD HOLE DIMM.

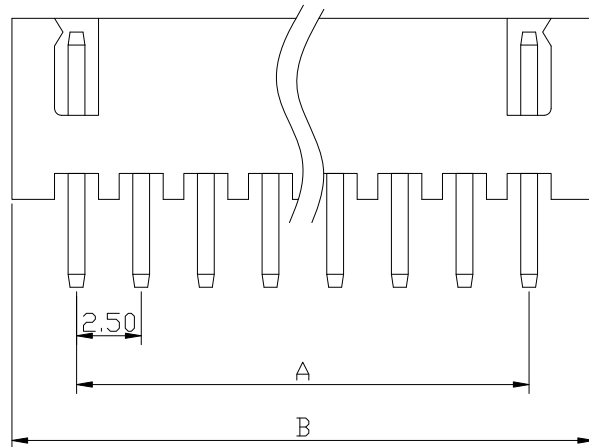

PART NO.	COLOR
CX-W250-XXB	BLACK
CX-W250-XXBL	BLUE
CX-W250-XXR	RED
CX-W250-XXY	YELLOW

Specifications

Current Rating: 3A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0



Poles	Dimension mm (in.)		Note.
	A	B	
02	2.50 (0.098)	7.50 (0.295)	
03	5.00 (0.197)	10.00 (0.394)	
04	7.50 (0.295)	12.50 (0.492)	
05	10.00 (0.394)	15.00 (0.591)	
06	12.50 (0.492)	17.50 (0.689)	
07	15.00 (0.591)	20.00 (0.787)	
08	17.50 (0.689)	22.50 (0.886)	
09	20.00 (0.787)	25.00 (0.984)	
10	22.50 (0.886)	27.50 (1.082)	
11	25.00 (0.984)	30.00 (1.181)	
12	27.50 (1.082)	32.50 (1.280)	
13	30.00 (1.181)	35.00 (1.378)	
14	32.50 (1.280)	37.50 (1.476)	
15	35.00 (1.378)	40.00 (1.575)	
16	37.50 (1.476)	42.50 (1.673)	
17	40.00 (1.575)	45.00 (1.772)	
18	42.50 (1.673)	47.50 (1.870)	
19	45.00 (1.772)	50.00 (1.969)	
20	47.50 (1.870)	52.50 (2.067)	



承洧科技股份有限公司
Chereng Wee Technology Corp.

DESCRIPTION(内容):
2.5mm Wire-to-Board Header
DIP 180° Type (RoHS)

PART NO:
(料 號) CX-W250-XX _
DWG NO(圖號): 2501J-XX-ST

DRAWN(製圖):
GONG
CHECKED(確認):
TERESA
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
X. XX ± 0.25
X. X ± 0.35
SCALE(比例):
FREE

REV:
R1
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2009.05.19
R1	2014年8月料號P數編碼統一兩碼&圖面更新	2015.02.25
R2		
R3		