

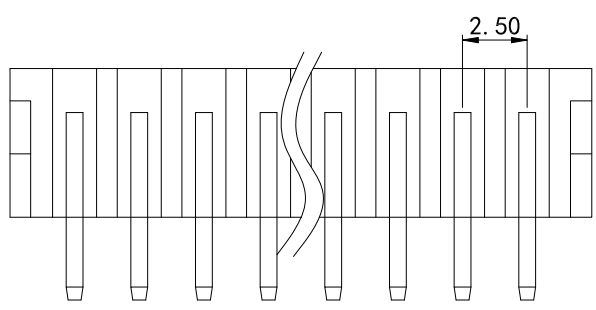


SPECIFICATIONS
Current Rating: 3A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0

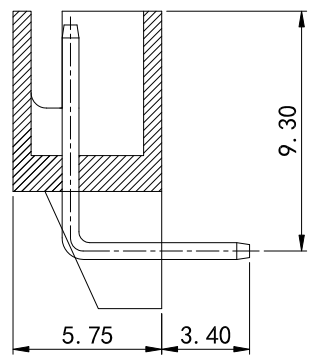

PART NO.	COLOR
CX-W250R-XX	WHITE
CX-W250R-XXB	BLACK
CX-W250R-XXBL	BLUE
CX-W250R-XXR	RED
CX-W250R-XXY	YELLOW

Poles	Dimension mm (in.)		Note.
	A	B	
02	2.50 (0.098)	7.50 (0.295)	
03	5.00 (0.197)	10.00 (0.394)	
04	7.50 (0.295)	12.50 (0.492)	
05	10.00 (0.394)	15.00 (0.591)	
06	12.50 (0.492)	17.50 (0.689)	
07	15.00 (0.591)	20.00 (0.787)	
08	17.50 (0.689)	22.50 (0.886)	
09	20.00 (0.787)	25.00 (0.984)	
10	22.50 (0.886)	27.50 (1.802)	
11	25.00 (0.984)	30.00 (1.181)	
12	27.50 (1.802)	32.50 (1.280)	
13	30.00 (1.181)	35.00 (1.378)	
14	32.50 (1.280)	37.50 (1.476)	
15	35.00 (1.378)	40.00 (1.575)	
16	37.50 (1.476)	42.50 (1.673)	

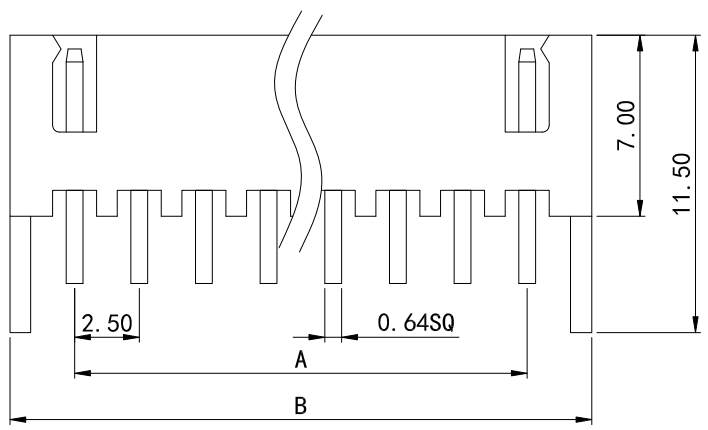

承洧科技股份有限公司
Cherrng Wee I Technology Corp.

DESCRIPTION(內容):
**2.5mm Wire-to-Board Header
DIP 90° Type(RoHS)**

PART NO:
(料 號) **CX-W250R-XX**

DWG NO(圖號): **2501J-XX-RT**

DRAWN(製圖):
GONG

CHECKED(確認):
TERESA

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
X.XX ± 0.25
X.X ± 0.35

SCALE(比例):
FREE

REV:
R4

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2005.12.01
R1	2007年圖面版本更新 追加COLOR(BROWN) & 變更圖號,公差	2007.07.16
R2 R3	取消(BROWN)PART NO. 補充(YELLOW)PART NO 17pin以上停產	2007.10.12 2010.10.27
R4	2014年8月料號P數編碼統一兩碼	2016.03.14