

A

B

C

D

E

SPECIFICATIONS

Current rating: 1A AC, DC.

Voltage rating: 100V AC, DC.



Temperature range: -25°C to +85°C

Contact resistance: 20mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 500V AC/minute.

Material: Nylon 66, UL94V-0.

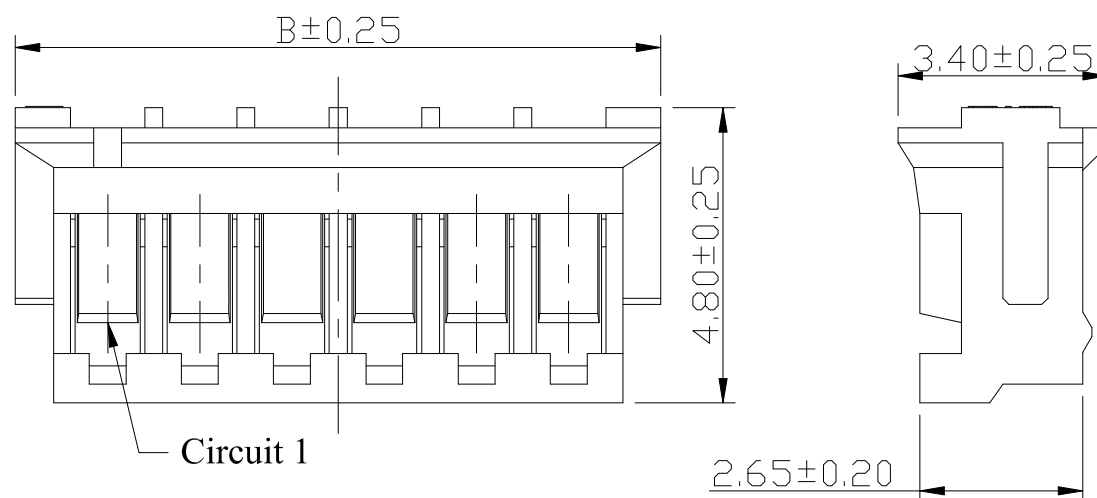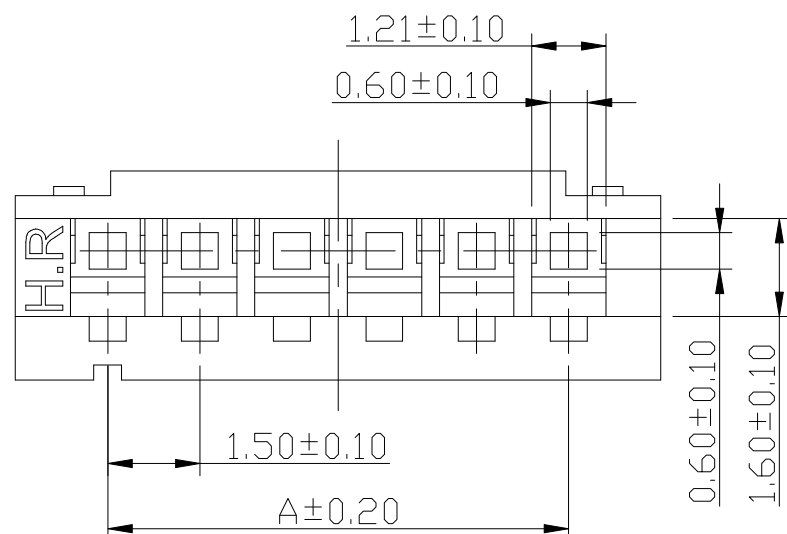

Part NO.	Circuit No.	Dimensions	
		A	B
CZ-H15-02A	02P	1.50	4.50
CZ-H15-03A	03P	3.00	6.00
CZ-H15-04A	04P	4.50	7.50
CZ-H15-05A	05P	6.00	9.00
CZ-H15-06A	06P	7.50	10.50
CZ-H15-07A	07P	9.00	12.00
CZ-H15-08A	08P	10.50	13.50
CZ-H15-09A	09P	12.00	15.00
CZ-H15-10A	10P	13.50	16.50
CZ-H15-11A	11P	15.00	18.00
CZ-H15-12A	12P	16.50	19.50
CZ-H15-13A	13P	18.00	21.00
CZ-H15-15A	15P	21.00	24.00



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

**1.50mm Wire-to-Board
Housing (方孔型)(RoHS)**

PART NO:
(料 號) **CZ-H15-XXA**

DWG NO(圖號): **A1500H-XP**

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ±0.25
. XX ±0.15

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

2014料號P數編碼統一兩碼

DATE

2013.01.24

2014.12.19

A

B

C

D

E