



TYPE A

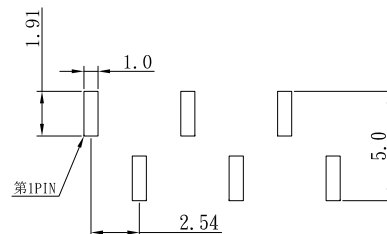


TYPE A

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40° C +105° C
Soldering Temperature	:260° C for 3~5sec Max
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

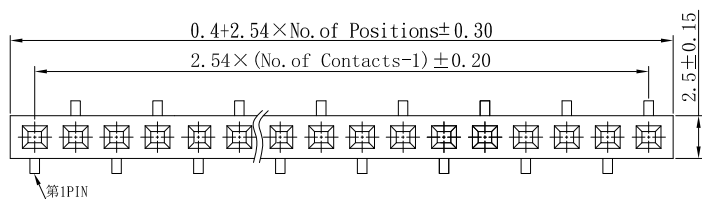


TYPE B

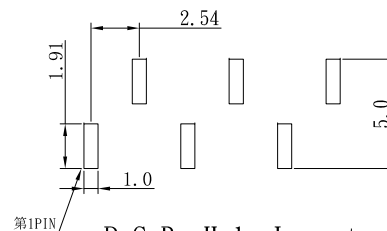

TYPE B

P.C.B. Hole Layout

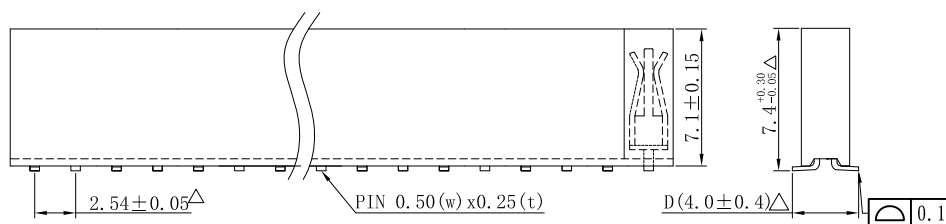

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F102	X	X	X	- DXXX	- XX	- XT
(Female Header Single Row) F102 (2.54 H:7.1 W:2.5)	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T NI:Nylon-9T (Standard:N)	M-D D040	(02 TO 40 Contacts)	AT:TYPE A BT:TYPE B



DESCRIPTION(內容):
2.54mm Female Header H:7.1 W:2.5 SMT (RoHS)
PART NO: (料號) F102-MG_-D040-XX-XT
DWG NO(圖號):

DRAWN(製圖): 邓文广
CHECKED(確認): 邓文广
APPROVAL(核准): Jimmy

GENERAL TOLERANCE: (公差)
.X .XX .XXX
SCALE(比例): 1:XX

REV: A/1
UNIT: mm
SIZE: A4
SHEET: 1/1

REV	DESCRIPTION
1	△此符號表示重點管控尺寸
2	
3	
4	

DATE
2019.11.13