


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T/NL-9T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F102	X	X	X	DXXX	-XX
(Female Header Single Row) F102 (2.54 H:7.1)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	C: LCP P: PBT N: Nylon-6T N1: Nylon-9T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 20 Contacts)

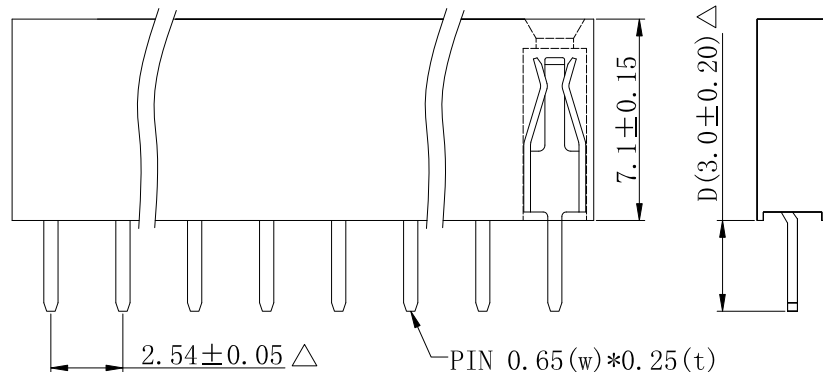

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.54mm Female Header H:7.1 W:2.5 180° (RoHS)	鄧文廣	(公差)	A/1			
PART NO: (料號) F102-SG_-D030-XX	CHECKED(確認): 黃炳秋	.X .XX .XXX	UNIT: mm	1	△ 此符號表示重點管控尺寸	2018.05.30
DWG NO(圖號):	APPROVAL(核准): 鄧文廣	SCALE(比例): XX:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		