
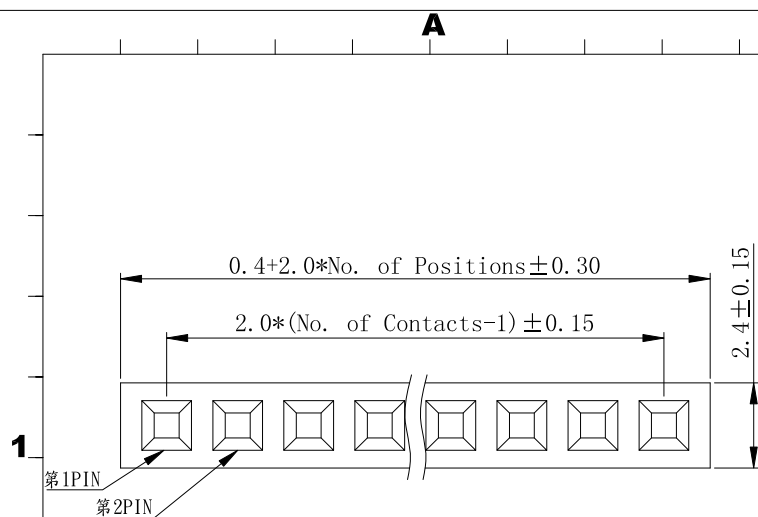


P. C. B. Layout

Specifications


Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40 °C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	
Note:	
Duplex plating: Gold Plated on contact area,	
Tin on solder area	

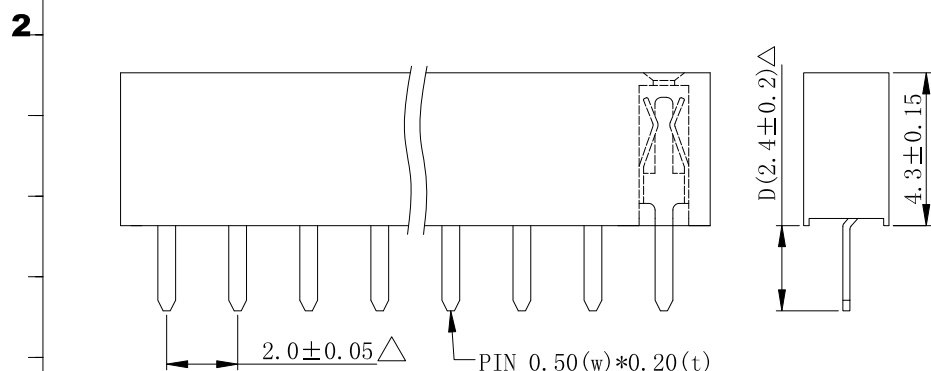


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>F301</u>	-	<u>X</u>	<u>X</u>	-	<u>XX</u>
(Female Header Single Row)	S:Straight Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T P:PBT (Standard:P)	S-D D024 (Standard:S-D024)	(02 TO 40 Contacts)
F301(2.00 H:4.3)					




DESCRIPTION(內容): 2.0mm Female Header H:4.3 W:2.4 180° Nylon-6T(RoHS)	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)		REV: A/4	REV	DESCRIPTION	DATE				
	CHECKED(確認): 劉建平	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm				1	△此符號表示重點管控尺寸	2005.08.13	
	PART NO: (料號) F301-SG_-D024-XX	APPROVAL(核准): 鄧文广	SCALE(比例): 1:XX					SIZE: A4	2	舊料號: CCPBB430S01×XXNL	2006.03.15
								SHEET: 1/1	3	舊料號: F301-XXSGN-D24	2006.06.05
									4	之前塑膠總長加膠0.6	2007.02.13
DWG NO(圖號):											



(產品)

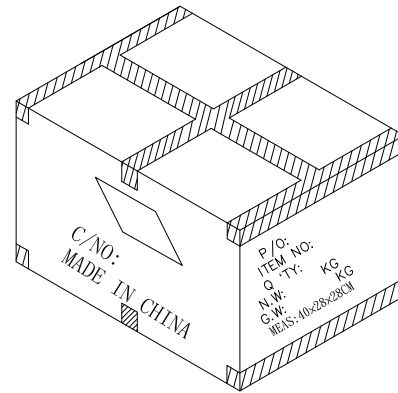

(1箱裝48盤產品)




環保標籤
內標籤

Part No:		承辦料號
Description:		品名規格
Quantity:		數量
Date:		日期



(V008真空盤)



(V008真空盤)

F301-SX X-D024-XX

Plating: G:Gold Flash
T: Tin Plated
A: 10U"Gold
B: 15U"Gold
C: 20U"Gold
D: Gold Flash/Tin
(Standard:G)
Material: N:Nylon-6T
P:PBT
(Standard:P)



- 1.真空盤規格：236x186x7.5mm,單重:(39g)
- 2.外箱規格:40x28x28cm,單重:(620g)
- 3.注未夠一整箱,請酌量選箱進行包裝

PIN數	包材名稱	每盤數量/PCS	單重/g	PIN數	包材名稱	每盤數量/PCS	單重/g
1*02	V017+PE袋	1500/PCS	0.07341	1*22	V008	196/PCS	0.80740
1*03	V017+PE袋	1500/PCS	0.11010	1*23	V008	196/PCS	0.84410
1*04	V017+PE袋	1200/PCS	0.14680	1*24	V008	196/PCS	0.88080
1*05	V017+PE袋	1000/PCS	0.18350	1*25	V008	147/PCS	0.91750
1*06	V008	735/PCS	0.22020	1*26	V008	147/PCS	0.95420
1*07	V008	637/PCS	0.25690	1*27	V008	147/PCS	0.99090
1*08	V008	539/PCS	0.29360	1*28	V008	147/PCS	1.02760
1*09	V008	490/PCS	0.33030	1*29	V008	147/PCS	1.06430
1*10	V008	441/PCS	0.36700	1*30	V008	147/PCS	1.10100
1*11	V008	392/PCS	0.40370	1*31	V008	147/PCS	1.13770
1*12	V008	392/PCS	0.44040	1*32	V008	147/PCS	1.17440
1*13	V008	343/PCS	0.47710	1*33	V008	147/PCS	1.21110
1*14	V008	294/PCS	0.51380	1*34	V008	98/PCS	1.24780
1*15	V008	294/PCS	0.55050	1*35	V008	98/PCS	1.28450
1*16	V008	294/PCS	0.58720	1*36	V008	98/PCS	1.32120
1*17	V008	245/PCS	0.62390	1*37	V008	98/PCS	1.35790
1*18	V008	245/PCS	0.66060	1*38	V008	98/PCS	1.39460
1*19	V008	245/PCS	0.69730	1*39	V008	98/PCS	1.43100
1*20	V008	196/PCS	0.73400	1*40	V008	98/PCS	1.46770



DESCRIPTION(內容)
2.0mm Female Header H:4.3 W:2.4 180°
(RoHS)

PART NO:
(料號) F301-SXX-D024-XX(包裝圖)

DWG NO(圖號):

DRAWN(製圖)
黃炳秋

CHECKED(確認):
黃炳秋

APPROVAL(核准):
鄧文廣

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):
1:XX

REV:
A/8

UNIT:

SIZE:
A4

SHEET:
1/1

REV

3 變更2-4PIN包裝

6 變更1*14PIN包裝數量

7 變更1*20PIN包裝數量

8 變更1*8PIN包裝數量

DESCRIPTION

DATE

2013.01.26

2013.07.16

2015.03.09

2016.03.07