


Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester,UL 94V-0
Standard	:NL-6T/LCP/PBT
Finish: Tin,Gold or Duplex Plated	
Standard: Gold Flash all over	



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F302	X	X	X	DXXX	-XX
(Female Header Single Row) F302 (2.00 H:4.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ⊙ Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T (Standard: P)	S-D D024 (Standard: S-D024)	(02 TO 40 Contacts)

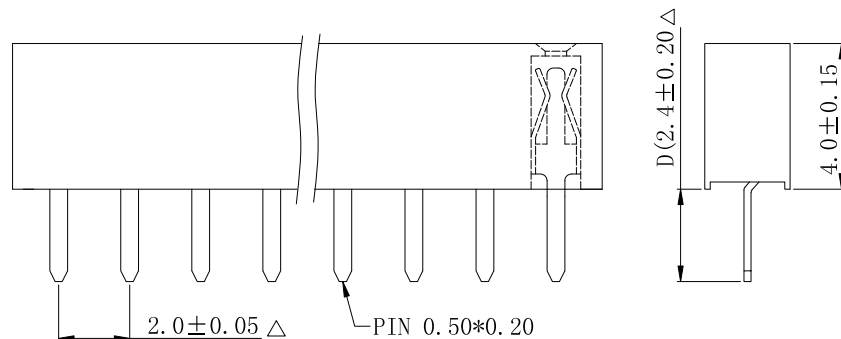

DESCRIPTION(内容): 2.0mm Female Header H:4.0 W:2.4 180° (RoHS)	DRAWN(製圖): 鄧文廣		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認): 鄧文廣		.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm			
	APPROVAL(核准): Jimmy		SCALE(比例): 1:XX		SIZE: A4			
	DWG NO(圖號):				SHEET: 1/1			
PART NO: (料號) F302-SG_-D024-XX						1	△此符號表示重點管控尺寸	2016.03.20
						2		
						3		
						4		