
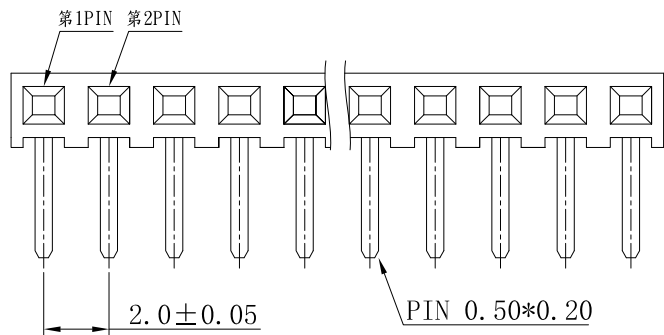
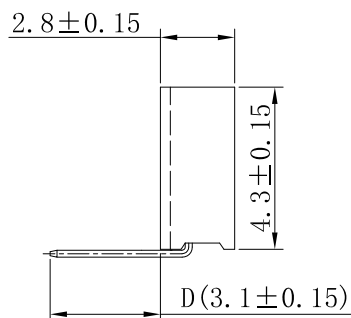


P.C.B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	
Note:	
Duplex plating: Gold Plated on contact area,	
Tin on solder area	

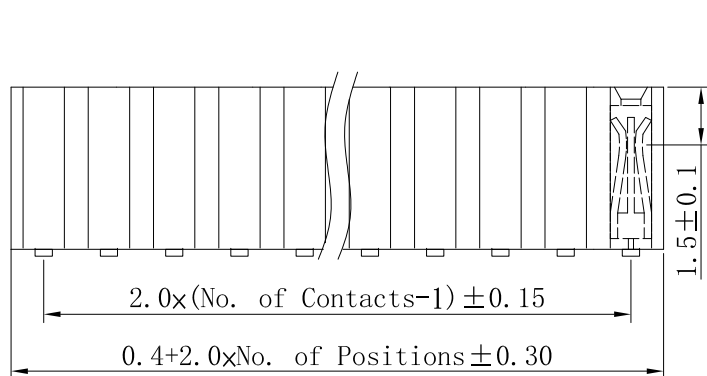

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F311	X	X	X	DXXX	-XX
(Female Header Single Row)	R:Right Angle	G:Gold Flash T:Thin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T N1:Nylon-9T (Standard:P)	R-D D031 (Standard:R-D031)	(02 TO 40 Contacts)
F311 (2.00 H:4.3 W:2.8)					