

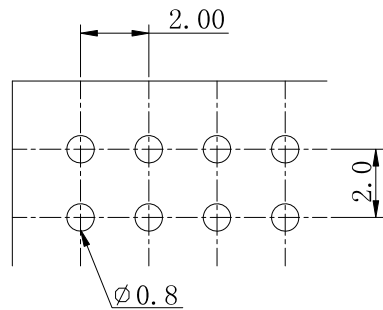


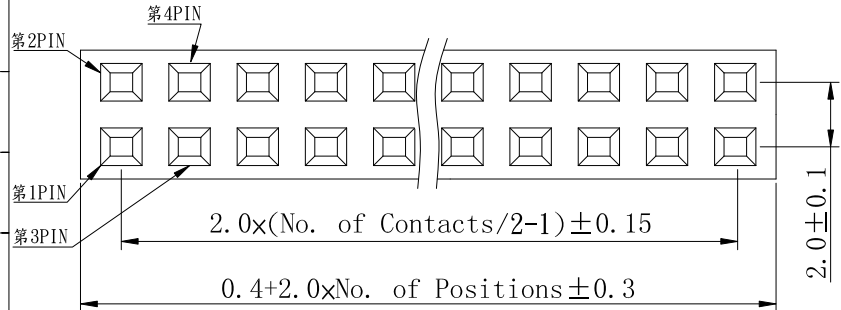

P.C.B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/Nylon-9T/PBT/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	
Note:	
Duplex plating: Gold Plated on contact area,	
Tin on solder area	

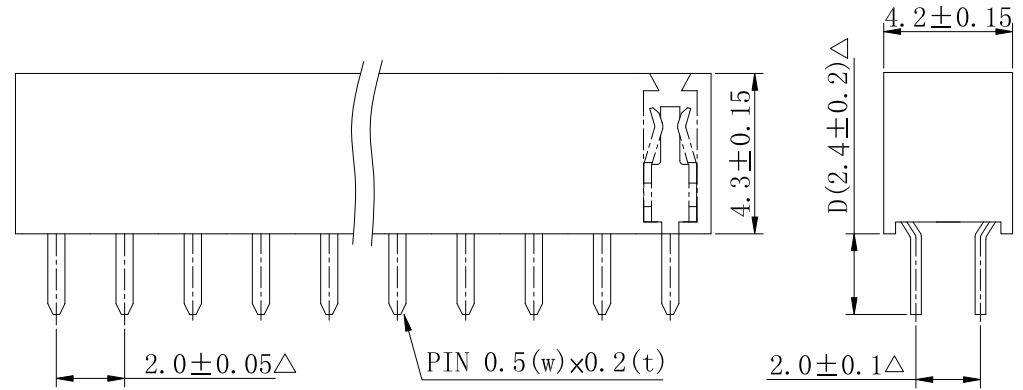

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F401	X	X	X	DXXX	-XX
(Female Header Dual Row) F401 (2.00 H: 4.3)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T NI: Nylon-9T C: LCP P: PBT (Standard: N)	S-D D024 (Standard: S-D024)	(04 TO 80 Contacts)



DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.0mm Female Header H:4.3 W:4.2 180° (RoHS)	鄧文廣	(公差)	A/1			
PART NO: (料號) F401-SG_-D024-XX	CHECKED(確認): 劉建平	.X .XXX .XX .X° .XXX .XX°	UNIT: mm	1	△ 此符號表示重點管控尺寸	2017.11.17
DWG NO(圖號):	APPROVAL(核准): 鄧文廣	SCALE(比例): XX:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		