

A

B



C

D

E

1

1

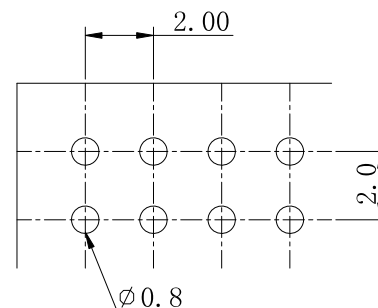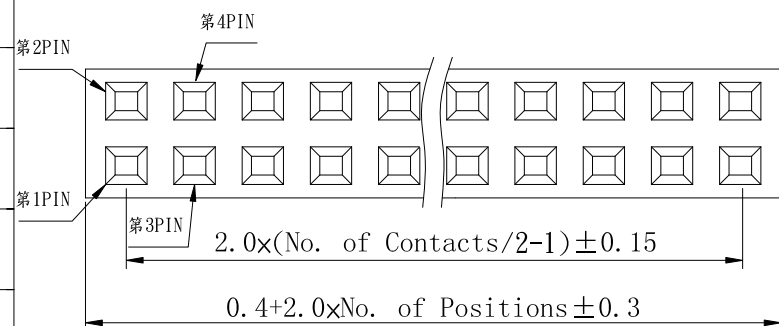

P. C. B. Hole Layout


Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP/PBT
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over



2

2

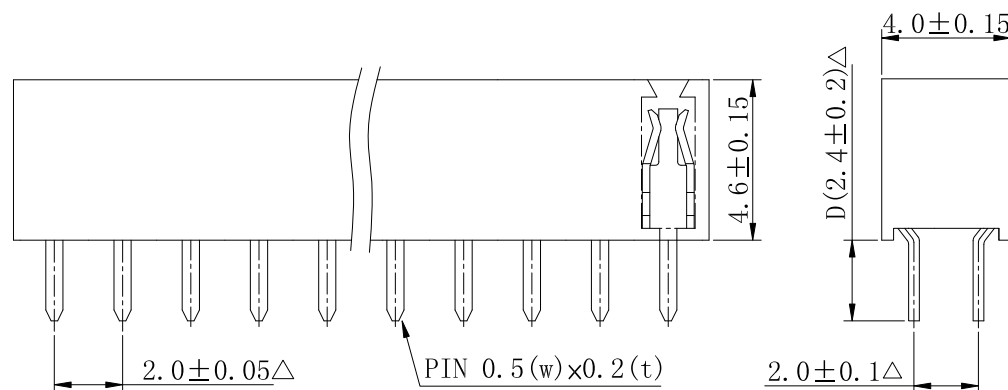

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F403	X	X	X	- DXXX	-XX
(Female Header Dual Row) F403 (2.00 H:4.6 W:4.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T (Standard: P)	S-D D024 (Standard: S-D024)	(04 TO 80 Contacts)

3

3



DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.0mm Female Header H:4.6 W:4.0 180° (RoHS)	鄧文廣	(公差)	A/1			
PART NO: (料號)	CHECKED(確認):	.X .XX .XXX	UNIT: mm	1	△ 此符號表示重點管控尺寸	2019.02.20
DWG NO(圖號):	APPROVAL(核准):	.XXXX .X° .XX°	SIZE: A4	2		
	SCALE(比例):	XX:XX	SHEET:	3		
			1/1	4		

A

B

C

D

E