



P.C.B. Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:LCP/NL-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

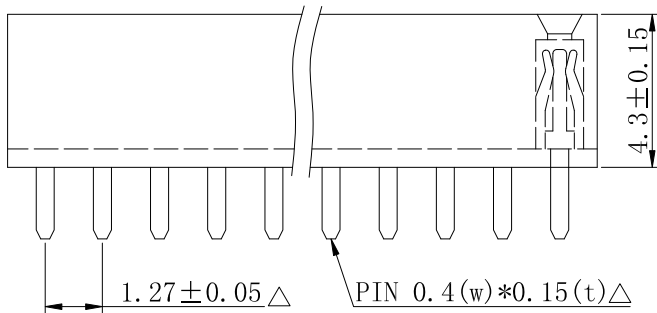

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F503	X	X	X	DXXX	-XX
(Female Header Single Row) F503 (1.27 H:4.3 W:2.2)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	C: LCP N: Nylon-6T (Standard: N)	S-D D024 (Standard: S-D024)	(02 TO 40 Contacts)



DESCRIPTION(内容):

1.27mm Female Header 180° H:4.3 W:2.2 (RoHS)

PART NO:
(料 號)

F503-SG_-D024-XX

DWG NO(圖號):

DRAWN(製圖):

鄧文廣

CHECKED(確認):

鄧文廣

APPROVAL(核准):

Jimmy

GENERAL TOLERANCE:

(公差)

.X
.XX
.XXX

.XXXX
.X°
.XX°

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2018.01.07