


A

B

C


D

E



NO. 1


A TYPE

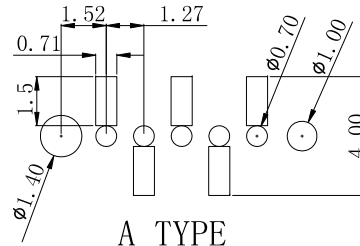



A TYPE

Specifications



Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40° C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

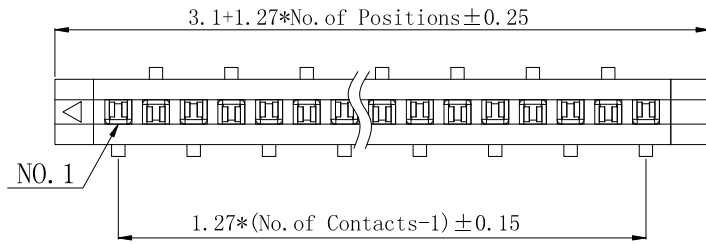

B TYPE

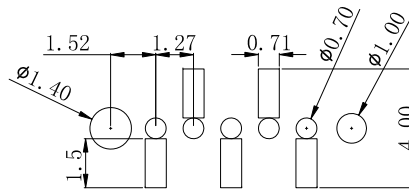B TYPE
P.C.B Hole Layout

剖面圖 A-A

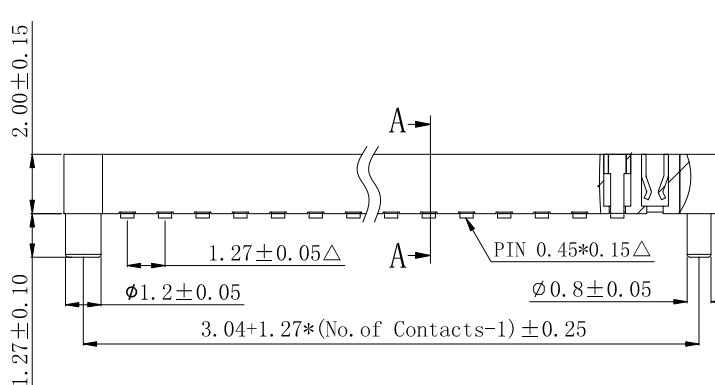

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F507-	X	X	X	-DXXX	-XX	-XT
(FemaleHeader Single Row) F507 (1.27 H:2.0 塑膠兩側帶外柱)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D030	(04 TO 40 Contacts)	AT:A TYPE BT:B TYPE



DESCRIPTION(內容):
1.27mm Female Header H:2.0 SMT
Nylon-6T, 帶外柱 (RoHS)

PART NO:
(料號) F507-MGN-D030-XX-XT

DWG NO(圖號):

DRAWN(製圖):
劉建平

CHECKED(確認):
黃炳秋

APPROVAL(核准):
鄧文廣

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
XX:XX

REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

2006.09.27

A

B

C

D

E