



P. C. B Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-9T/Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

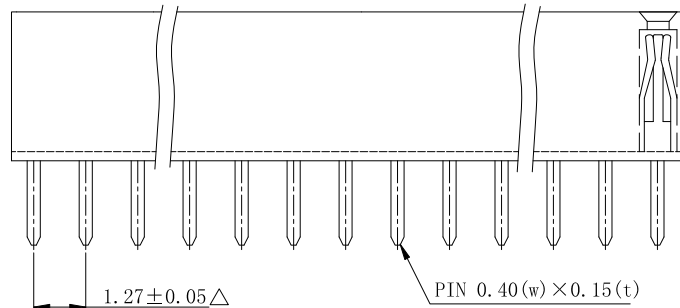

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F604	X	X	X	DXXX	-XX
(Female Header Dual Row) F604 (1.27 H:3.4)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N1: Nylon-9T N: Nylon-6T C: LCP (Standard: N1)	S-D D024 (Standard: S-D024)	(04 TO 80 Contacts)



DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.27mm Female Header H:3.4 W:3.0 180° (RoHS)	鄧文廣	(公差)	A/1			
PART NO: (料號) F604-SG_-D024-XX	CHECKED(確認): 鄧文廣	.X .XX .XXX	UNIT: mm	1	△此符號表示重點管控尺寸	2016.07.12
DWG NO(圖號):	APPROVAL(核准): Jimmy	SCALE(比例): 1:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		