



A

B

C

D



E

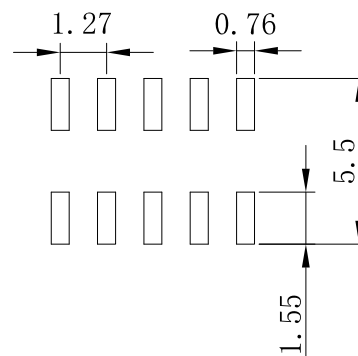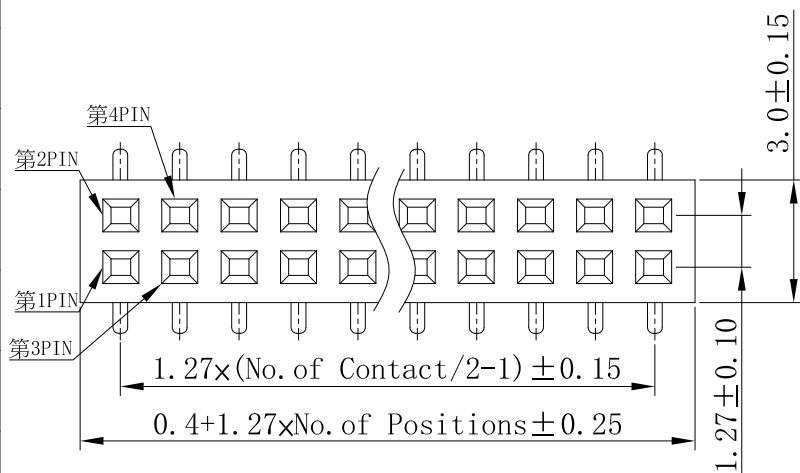

P. C. B. Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5s Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

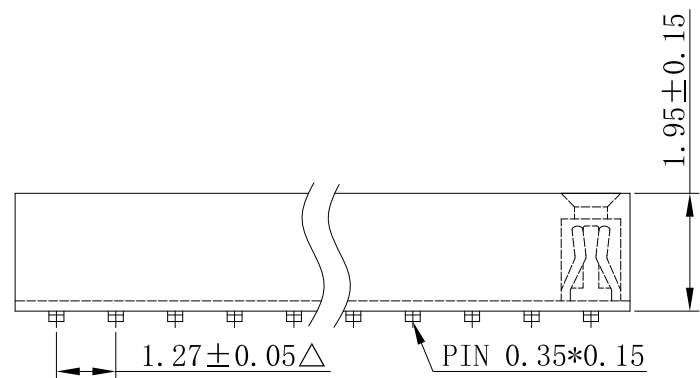

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F605	X	X	X	DXXX	XX
(Female Header Dual Row) F605 (1.27 H:1.95)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T N1:Nylon-9T (Standard:N)	M-D D044	(04 TO 80 Contacts)



DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.27mm Female Header H:1.95 W:3.0 SMT (RoHS)	邓文广	(公差)	A/1			
PART NO: (料 號) F605-MG_-D044-XX	CHECKED(確認): 邓文广	.X .XX .XXX .XXXX .X° .XX°	UNIT: mm	1	△此符號表示重點管控尺寸	2019.11.13
DWG NO(圖號):	APPROVAL(核准): Jimmy	SCALE(比例): 1:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		

A

B

C

D

E