



P. C. B Layout

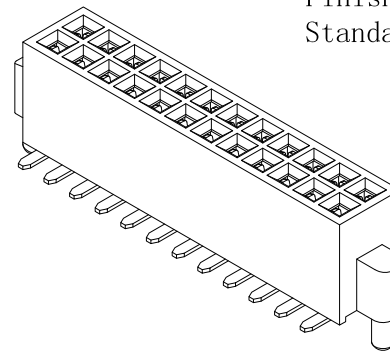


Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:LCP/NL-6T
Finish	:Gold Plated
Standard	:Gold Flash all over



SECTION A-A

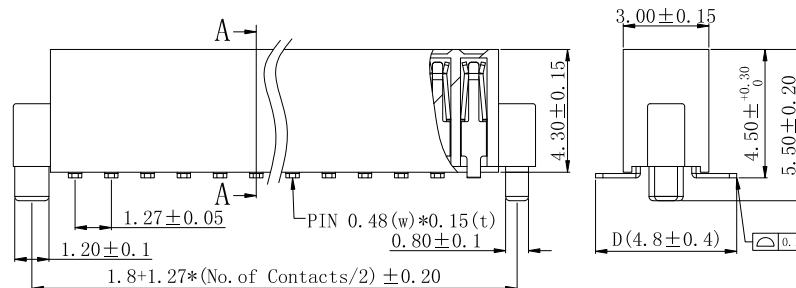

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F607	X	X	X	DXXX	-XX
(Female Header Dual Row)	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	M-D D048 (Standard:M-D048)	(06 TO 80 Contacts)
F607 (1.27 H:4.3 W:3.0 側面帶大小柱)					



DESCRIPTION(内容):
1.27mm Female Header H:4.3 W:3.0 SMT
側面帶大小柱 (RoHS)

PART NO:
(料號) F607-MG_-D048-XX

DWG NO(圖號): RDA160912-001

DRAWN(製圖):
鄧文广

CHECKED(確認):
鄧文广

APPROVAL(核准):
Jimmy

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX

REV:
A/2

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

去掉電鍍半金錫

DATE

2016.09.12

2018.12.13