

A



B

C

D

E

1

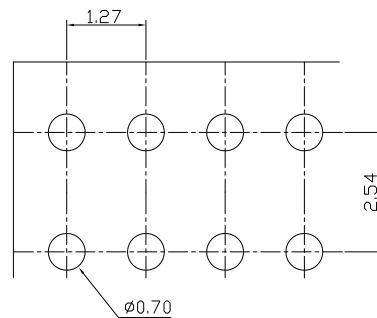
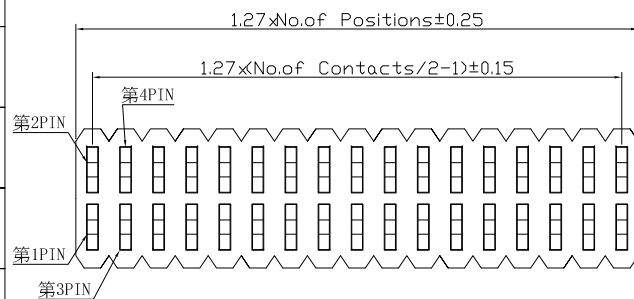


P.C.B Hole Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

2

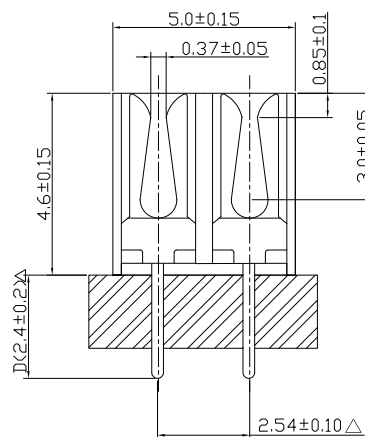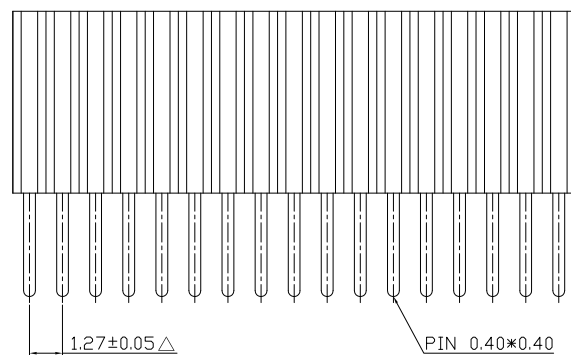

Series

F609

(Female Header
Dual Row)F609 (1.27*2.54 H:4.6
W:5.0)Connector
Type

X

S: Straight Type

Contact
Plating

X

G: Gold Flash
T: Tin Plated
A: 10U" Gold
B: 15U" Gold
C: 20U" Gold© Duplex Plating
D: Gold Flash/Tin
(Standard: G)

Material

X

C: LCP
N: Nylon-6T
N1: Nylon-9T
(Standard: N)Pin
Length

DXXX

S-D
D024
(Standard: S-D024)Number of
Contacts

-XX

(04 TO 80
Contacts)

3



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

1.27mm Female Header 180° H:4.6 W:5.0
波浪型 (RoHS)PART NO:
(料 號)

F609-SG_-D024-XX

DWG NO(圖號):

DRAWN(製圖):

邓文广

CHECKED(確認):

邓文广

APPROVAL(核准):

Jimmy

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2019.11.13

A

B

C

D

E

FILE NO: CWJ-4E-09