

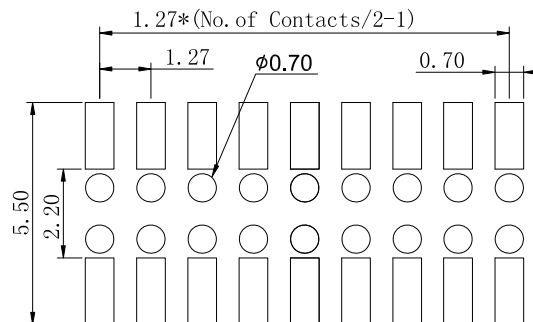



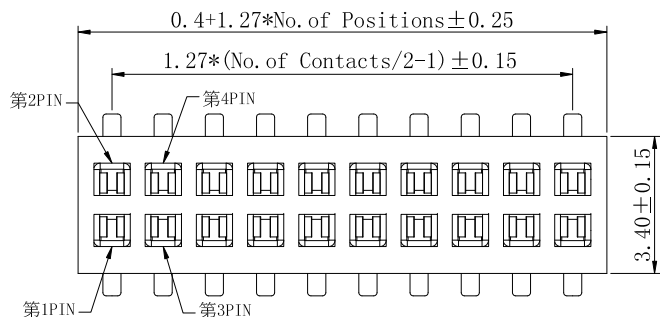


P. C. B Layout

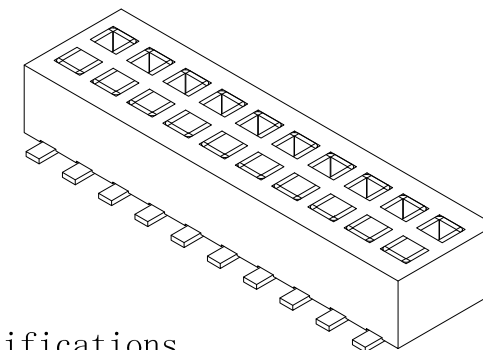

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

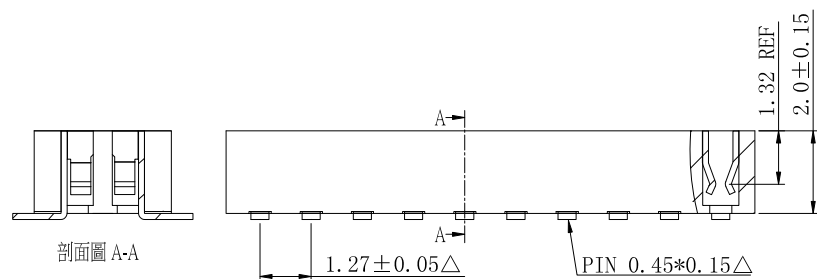

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F623 -	X	X	X	- DXXX	- XX
(Female Header Dual Row) F623 (1.27 H:2.00 W:3.4)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D045	(04 TO 80 Contacts)



DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.27mm Female Header H:2.00 W:3.4 SMT Nylon-6T (RoHS)	劉建平	(公差)	A2			
PART NO: (料號) F623-MGN-D045-XX	CHECKED(確認): 黃炳秋	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	1	△此符號表示重點管控尺寸	2006.11.06
DWG NO(圖號):	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:XX	SIZE: A4	2	舊料號:F606-MGN-D045-XX	2007.01.09
			SHEET: 1/1	3		
				4		