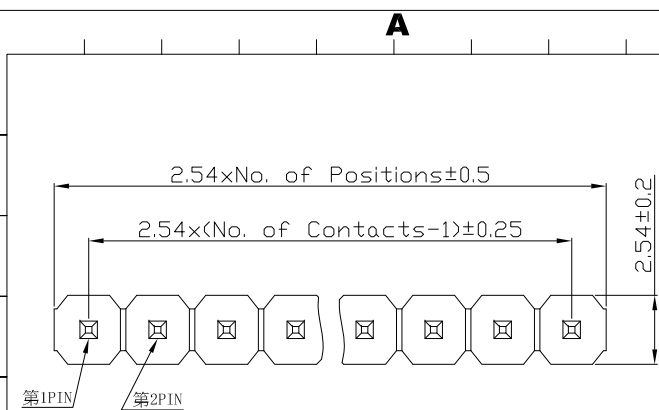


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P101	X	X	X	A / B	X X
(Pin Header Single Row) P101 (H:2.54)	K: "K" Type ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	A B (060) (047) (If you desire on other length, by marking put desired in the A/B)	(02 TO 40 Contacts)

Dim (6.0/4.7):

A: _____ B: _____



CHERNG WEEI

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 SMT □=0.64
臥貼式 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°

SCALE(比例):

1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE