




A TYPE

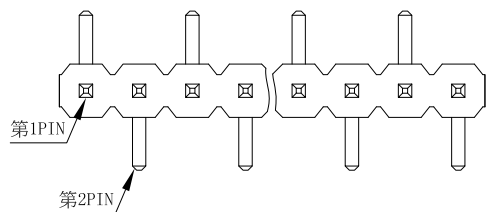


B TYPE

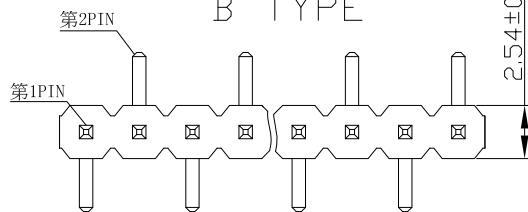

A TYPE

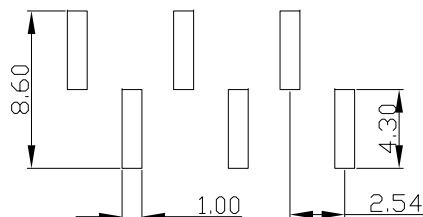



B TYPE

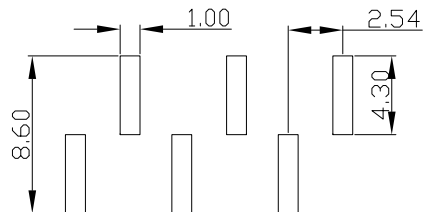

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Soldering Temperature	: 260°C for 3~5s Max.
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

P. C. B Hole Layout

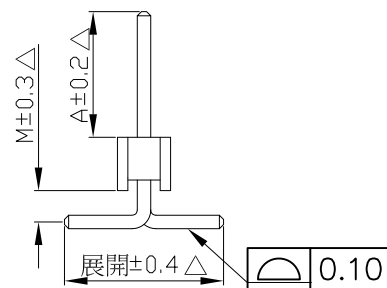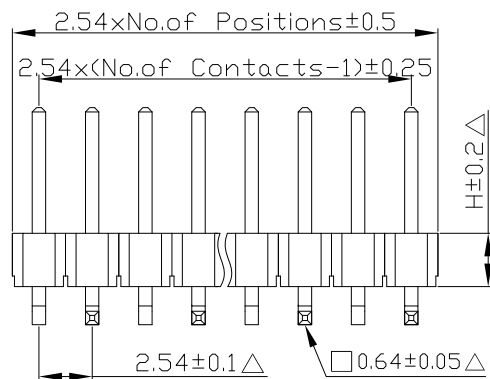

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts	A · B TYPE
P10X	X	X	X	A	XX	XT
(Pin Header Single Row)	M:SMT Type M0:1.50mm M5:0.32mm M6:0.50mm M8:1.00mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	A (060) (If you desire on other length, by marking put desired in the A)	(02 TO 40 Contacts)	AT: A TYPE BT: B TYPE

Selectivity:

- ☐ P101 (H:2.54 展開:7.6) (Material (Sandard):Nylon-6T)
- ☐ P103 (H:2.54 展開:5.0) (Material (Sandard):Nylon-6T)

Dim(6.0):

A: _____

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 SMT □=0.64 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE