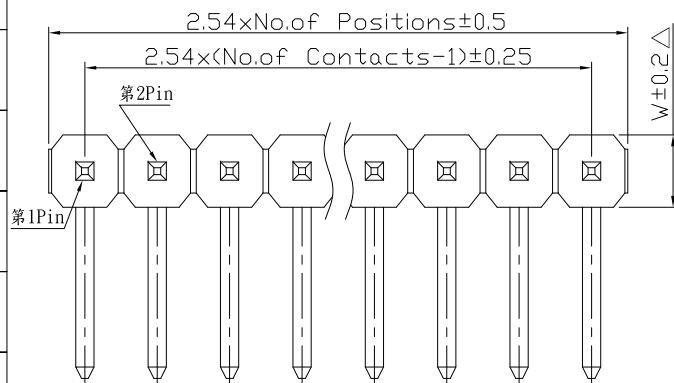


P.C.B Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0

Finish: Tin, Gold or Duplex Plated

Standard: Gold Flash all over

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P12X	X	X	X	A / C / B	XX
(Pin Header Single Row)	R:Right Angle Type (Down Angel Type)	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	A (060) C (025) B (030) (If you desire on other length, by marking put desired in the A/C/B)	(02 TO 40 Contacts)
P121 (H:2.54 W:2.54)	R1:1.5mm				

Selectivity:

- ☐ P121 (H:2.54 W:2.54) (Material (Sandard):PBT)
- ☐ P122 (H:1.7 W:2.54) (Material (Sandard):Nylon-6T)
- ☐ P123 (H:1.5 W:2.54) (Material (Sandard):Nylon-6T)

Dim(6.0/2.5/3.0):

A:_____ C:_____ B:_____

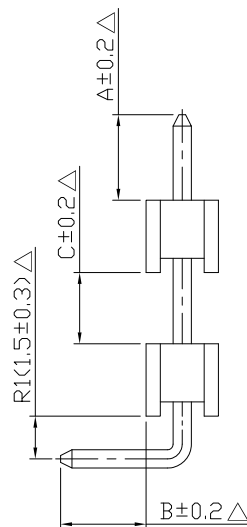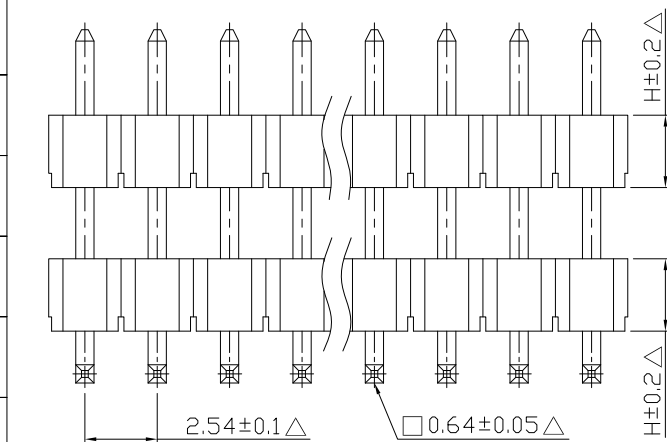

CHERNG WEEI

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 90° □=0.64
雙膠單排(RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE