

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:PBT/NL-6T/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P12X	- X	X	X	A / C / B	- X X
(Pin Header Single Row) P121 (H:2.54 W:2.54)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 100" Gold B: 150" Gold C: 200" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon 6T C: LCP (Standard: P)	A (060) C (025) B (030) (If you desire on other length, by marking put desired in the A/C/B)	(02 TO 40 Contacts)

Selectivity:

- ☐ P121 (H:2.54 W:2.54) (Material (Standard): PBT)
- ☐ P122 (H:1.7 W:2.54) (Material (Standard): Nylon-6T)
- ☐ P123 (H:1.5 W:2.54) (Material (Standard): Nylon-6T)

Dim(6.0/2.5/3.0):

A: _____ C: _____ B: _____

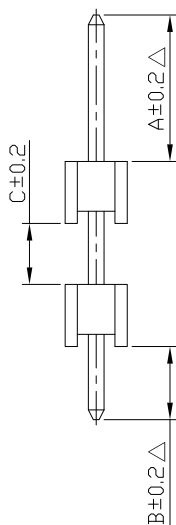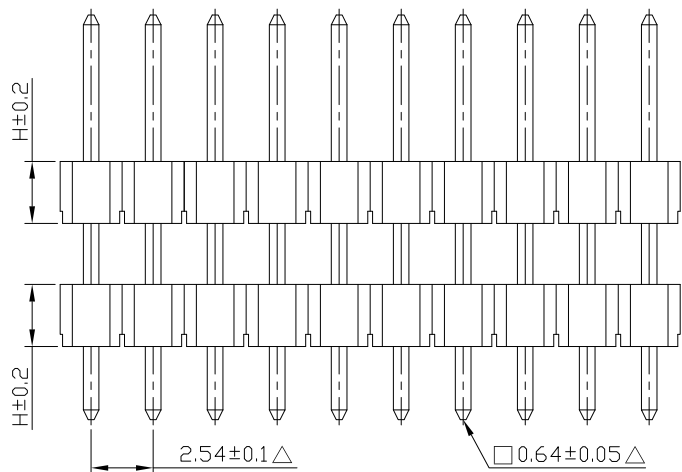

CHERNG WEEI

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 180° □=0.64
單排雙膠 (RoHS)

PART NO:
(料號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X.° ±5.0°
.X ±0.20 .X° ±3.0°
.XX ±0.15 .XX° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE