
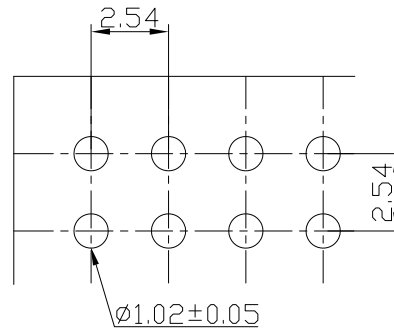


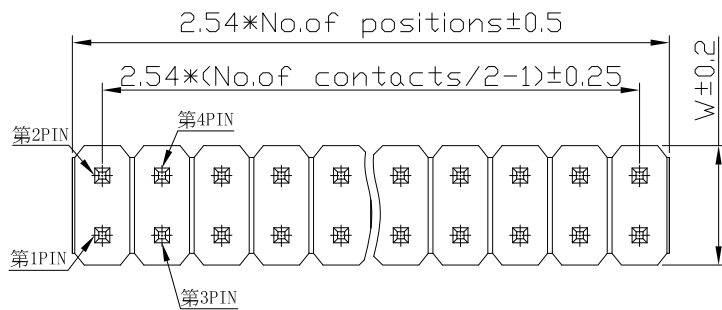

P. C. B Hole Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: P. B. T/NL-6T/LCP
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P20X	X	X	X	A / B	XX
(Pin Header Dual Row)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (060) B (030) (If you desire on other length, by marking put desired in the A/B)	(04 TO 80 Contacts)

Selectivity:

- ☐ P201 (H: 2.54 W: 5.08) (Material (Sandard): PBT)
- ☐ P202 (H: 1.7 W: 5.08) (Material (Sandard): Nylon-6T)
- ☐ P203 (H: 1.5 W: 5.08) (Material (Sandard): Nylon-6T)

Dim(6.0/3.0):

A: _____ B: _____

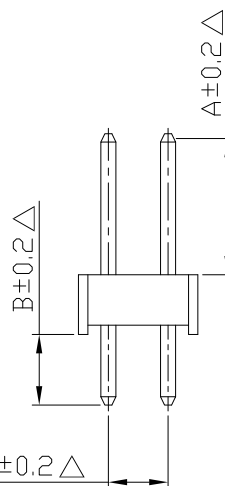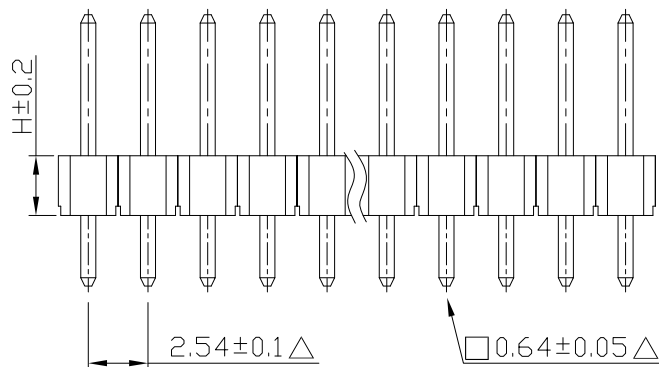

CHERNG WEEI

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 180° □=0.64 (RoHs)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09