
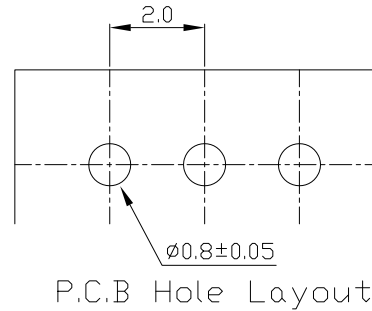


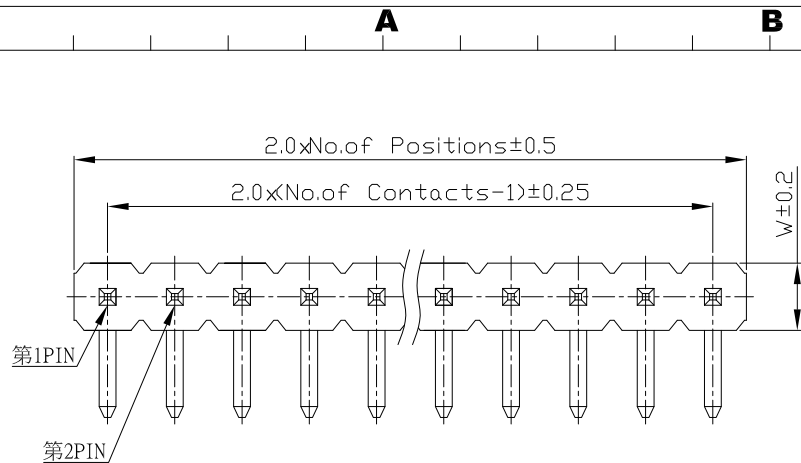

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500V
Operating Temperature	:-40 °C~+105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P30X	- X	X	X -	A / B	- X X
(Pin Header Single Row)	R:Right Angle Type (Down Angle Type) R2:1.0mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	A (040) B (023) (If you desire on other length, by marking put desired in the A/B) (P301 Standard:040/028)	(02 TO 40 Contacts)

Selectivity:

- ☐ P301 (H:2.0 W:2.0) (Material (Sandard):PBT)
- ☐ P302 (H:1.5 W:2.0) (Material (Sandard):Nylon-6T)

Dim(4.0/2.3):

A:_____ B:_____



CHERNG WEEI

DESCRIPTION(内容)

2.0mm Pin Header H:2.0 90° □= 0.50
(RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖)

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XX



REV:
A1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

0

1

2

3

DESCRIPTION

△此符號表示重點管控尺寸

DATE