

P.C.B Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P.B. T/NL-6T/LCP
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P30X</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A</u> / <u>B</u>	- <u>X</u> <u>X</u>
(Pin Header Single Row)	S: Straight Type ⋮	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin N: Nickel Plating (Standard: G)	P: PBT N: Nylon 6T C: LCP (Standard: P)	A (040) B (023) (If you desire on other length, by marking put desired in the A/B)	(01 TO 40 Contacts)

Selectivity:

- ☐ P301 (H:2.0 W:2.0) (Material (Standard):PBT)
- ☐ P302 (H:1.5 W:2.0) (Material (Standard):Nylon-6T)

Dim(4.0/2.3):

A: _____ B: _____

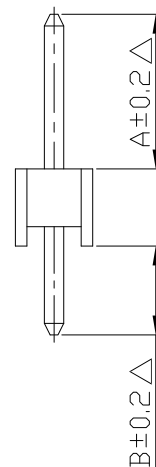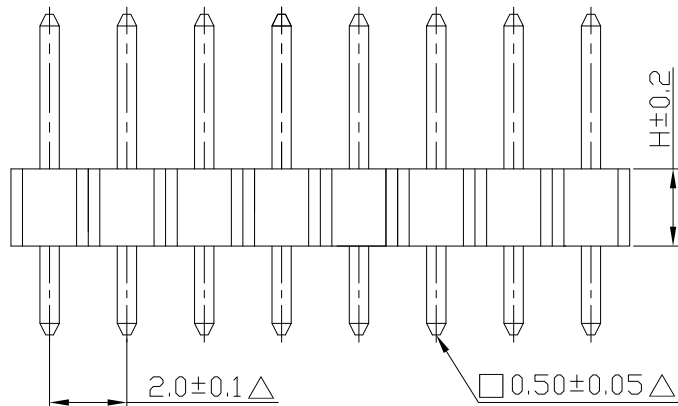

CHERNG WEEI

DESCRIPTION(内容):

2.0mm Pin Header H:2.0 180° □=0.50 (RoHs)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX



REV:
A/1

UNIT:
mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E