

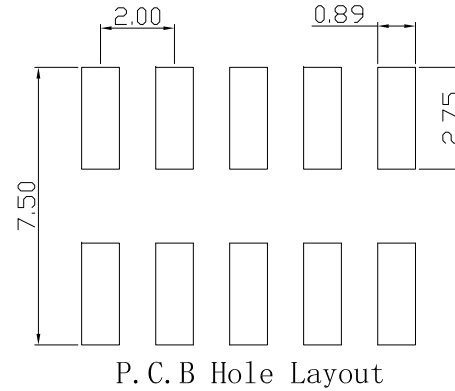
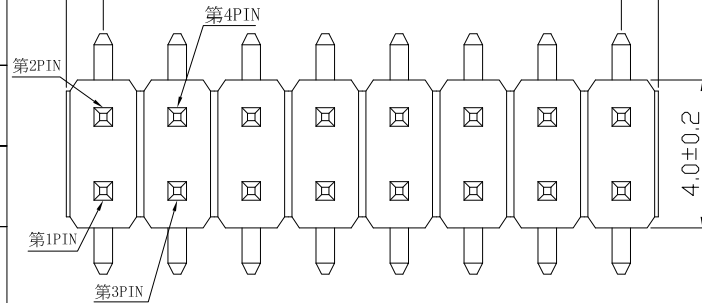
A

B

C

D

E

 $2.0 \times \text{No. of positions} \pm 0.5$ $2.0 \times (\text{No. of contacts} / 2 - 1) \pm 0.25$ 

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

1

1

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P40X	X	X	X	A	X X
(Pin Header Dual Row)	M: SMT Type M0: 1.50mm M4: 0.25mm M6: 0.50mm M8: 1.00mm ⋮	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	A (040) (If you desire on other length, by marking put desired in the A)	(04 TO 80 Contacts)

2

2

Selectivity:

- ☐ P401 (H: 2.0 展開: 6.5) (Material (Standard): Nylon-6T)
- ☐ P402 (H: 1.5 展開: 6.5) (Material (Standard): Nylon-6T)

Dim(4.0):

A: _____

3

3



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

2.0mm Pin Header H:2.0 SMT □=0.50
(RoHS)PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX

REV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09