
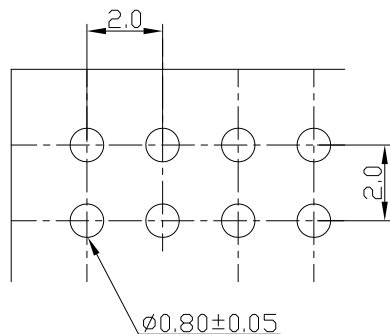


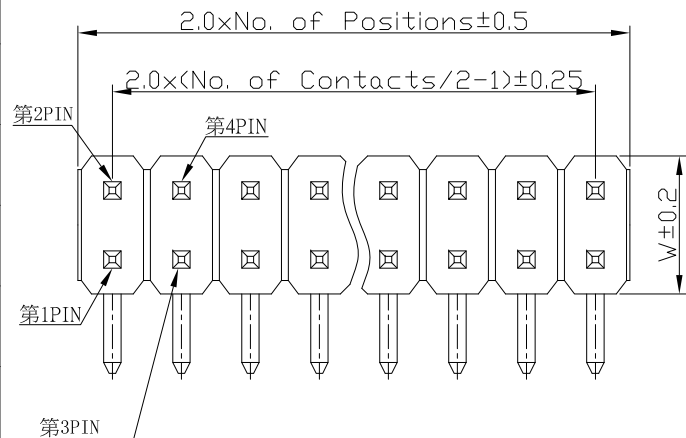

P.C.B Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/PBT/LCP
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P40X	-	X	X	A / B	- X X
(Pin Header Dual Row)	R:Right Angle Type (Down Angle Type) R2:1.0mm ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	A (040) B (023) (If you desire on other length, by marking put desired in the A/B)	(04 TO 80 Contacts)

Selectivity:

- ☐ P401 (H:2.0 W:4.0) (Material (Sandard):PBT)
- ☐ P402 (H:1.5 W:4.0) (Material (Sandard):Nylon-6T)

Dim(4.0/2.3):

A:_____ B:_____

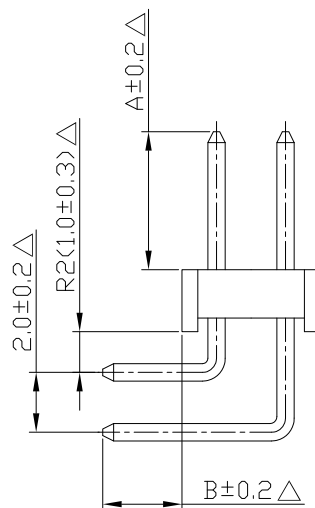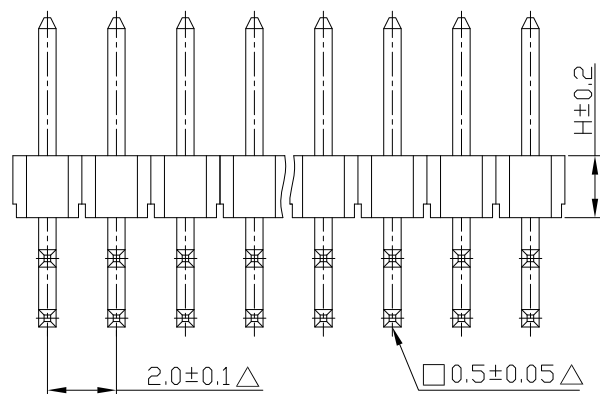

CHERNG WEEI

DESCRIPTION(内容):

2.0mm Pin Header H:2.0 90° □=0.50
(RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X.° ±5.0°
.X ±0.20 .X° ±3.0°
.XX ±0.15 .XX° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE