
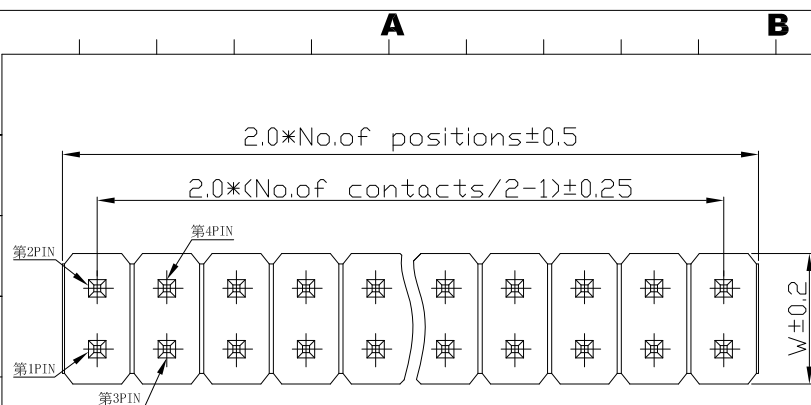


P.C.B Hole Layout

Specifications

Current Rating	: 2 Amp
Insulator Resistance	: 3000 Megohms Min.
Dielectric Withstanding	: AC 500V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T /PBT/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

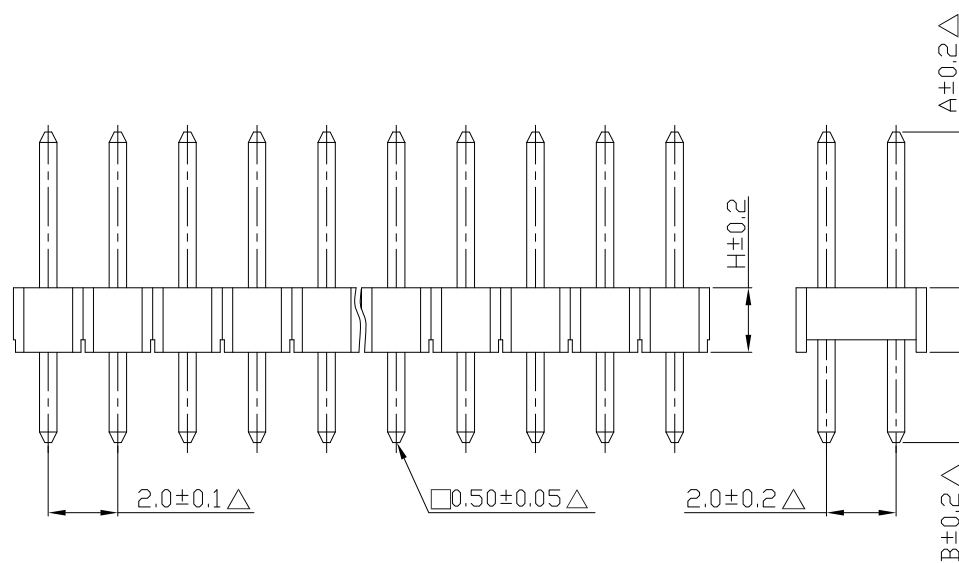

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts
P40X	X	X	X	A / B		X X
(Pin Header Dual Row)	S: Straight Type ⋮	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (040)	B (023)	(04 TO 80 Contacts)
				(If you desire on other length, by marking put desired in the A/B)		

Selectivity:

- ☐ P401 (H:2.0 W:4.0) (Material (Sandard):PBT)
- ☐ P402 (H:1.5 W:4.0) (Material (Sandard):Nylon-6T)

 $\text{Dim}(4.0/2.3):$

A: _____ B: _____



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容): 2.0mm Pin Header H:2.0 180° □= 0.50 (RoHS)	DRAWN(製圖):	GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):	X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX ° ±1.0°		UNIT: mm	1	△ 此符號表示重點管控尺寸	
				SIZE: A4	2		
				SHEET: 1/1	3		
					4		
PART NO: (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX					
DWG NO(圖號):							