



P.C.B Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0

Finish: Tin, Gold Plated

Standard: Gold Flash all over

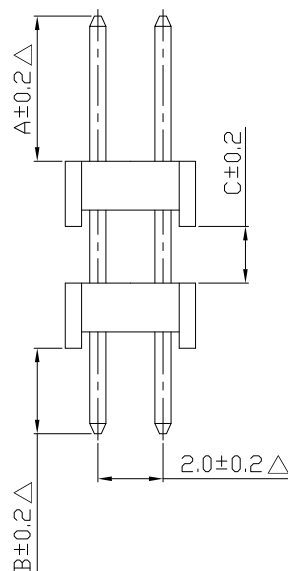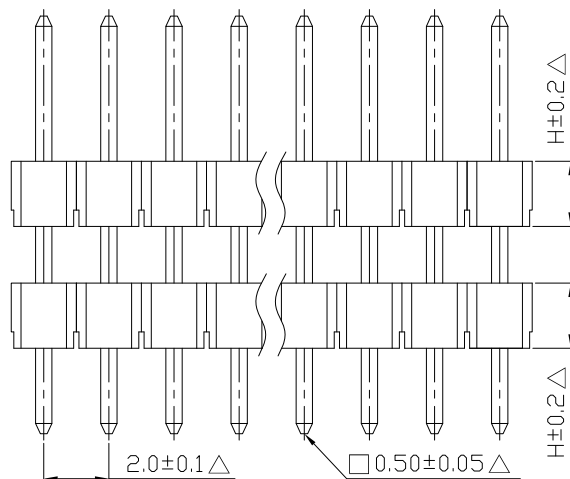

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P42X	- X	X	X	A / C / B	- XX
(Pin Header Dual Row)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold I: 30U"Gold (Standard: G) ◎ Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (040) C (020) B (028) (If you desire on other length, by marking put desired in the A/C/B)	(04 TO 80 Contacts)

Selectivity:

- ☐ P421 (H:2.0 W:4.0) (Material (Standard):PBT)
- ☐ P422 (H:1.5 W:4.0) (Material (Standard):Nylon-6T)

Dim(4.0/2.0/2.8):

A:_____ B:_____ C:_____



CHERNG WEEI

DESCRIPTION(内容):

2.0mm Pin Header H:2.0 180° □=0.50
雙排雙膠 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖)

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE