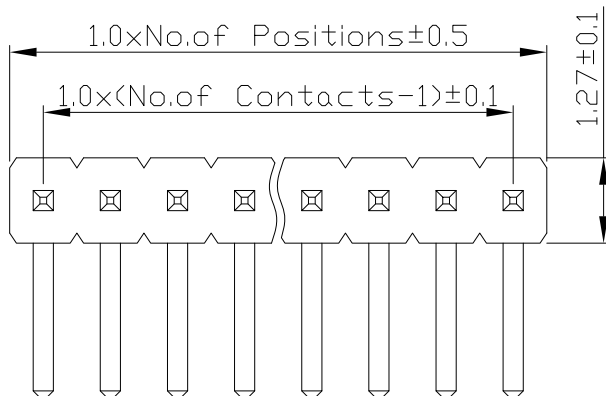




P.C.B Hold Layout

## Specifications

|                         |                                          |
|-------------------------|------------------------------------------|
| Current Rating          | :0.8 Amp                                 |
| Insulator Resistance    | :900 Megohms Min.                        |
| Dielectric Withstanding | :AC 500 V                                |
| Operating Temperature   | :-40°C~ +105°C                           |
| Contact Material        | :Brass                                   |
| Insulator Material      | :High Temperature Thermoplastic.UL 94V-0 |
| Standard                | :Nylon-6T                                |
| Finish                  | :Tin, Gold Plated                        |
| Standard                | :Gold Flash all over                     |

## How to order

| Series                  | Connector Type                                                           | Contact Plating                                                                                                            | Material                | Pin Length mm                                                                            | Number of Contacts  |
|-------------------------|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------------------------------------------------------------|---------------------|
| <u>P702</u>             | - <u>X</u>                                                               | <u>X</u>                                                                                                                   | <u>X</u>                | - <u>A</u> / <u>B</u>                                                                    | - <u>X</u> <u>X</u> |
| (Pin Header Single Row) | R:Right Angle Type (Down Angle Type)<br>R9:0.48mm<br>P702 (H:1.0 W:1.27) | G:Gold Flash<br>T:Tin Plated<br>A:10U"Gold<br>B:15U"Gold<br>C:20U"Gold<br>©Duplex Plating<br>D:Gold Flash/Tin (Standard:G) | N:Nylon-6T (Standard:N) | A (023)<br>B (023)<br>(If you desire on other length, by marking put desired in the A/B) | (01 TO 50 Contacts) |

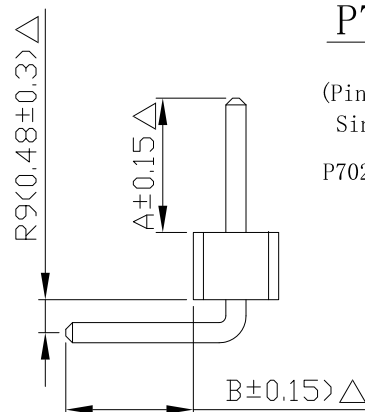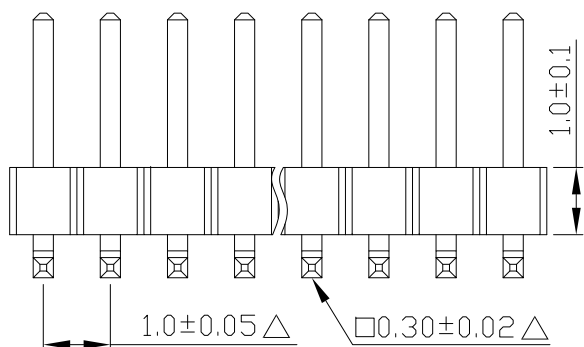

Dim(2.0/1.9):

A:\_\_\_\_\_ B:\_\_\_\_\_



CHERNG WEEI

DESCRIPTION(内容):

1.0mm Pin Header H:1.0 90° □=0.30  
Nylon-6T (RoHS)

PART NO:  
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:  
(公差)

.X .XXXX  
.XX .X°  
.XXX .XX°

SCALE(比例):

1:XX



REV:  
A/1

UNIT:  
mm

SIZE:  
A4

SHEET:

X/X

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09