



A

B

C

D

E

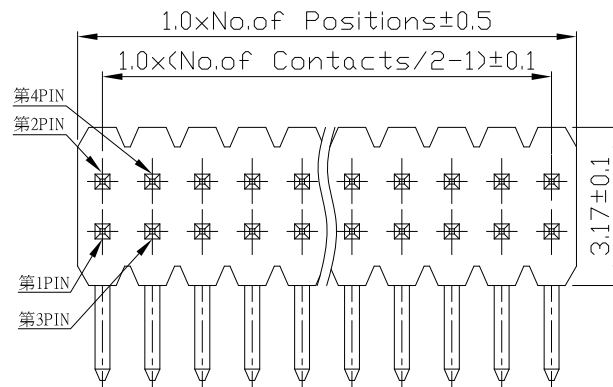

P. C. B Hole Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold Plated
Standard	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P801	- X	X	X	A / B	X X
(Pin Header Dual Row) P801 (H:1.5 W:3.17)	R:Right Angle Type (Down Angle Type) R9:0.48mm ⋮	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T (Standard:N)	A (020) B (019) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(2.0/1.9):

A: _____ B: _____



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

1.0mm Pin Header H:1.5 90° □=0.30
(RoHS)PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差).X .XXXX
.XX .X °
.XXX .XX °SCALE(比例):
1:XXREV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09