



A

B

C

D

E

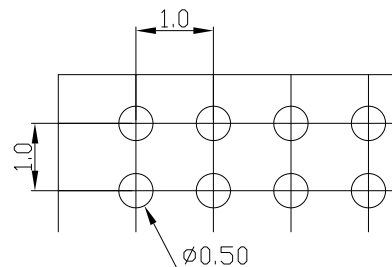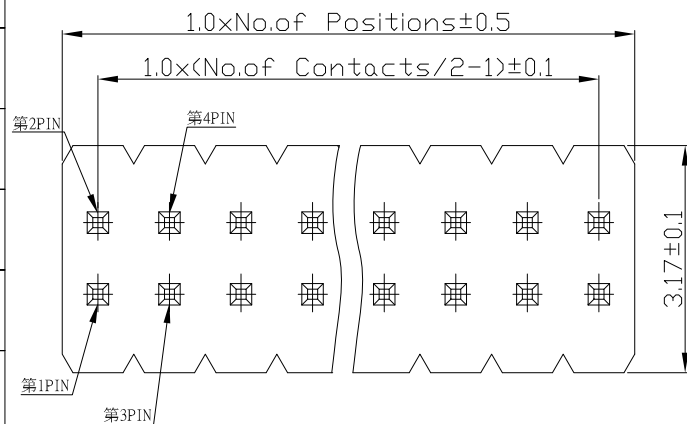


P. C. B Hole Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material	:Copper Alloy
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
	:Gold Flash all over

How to order

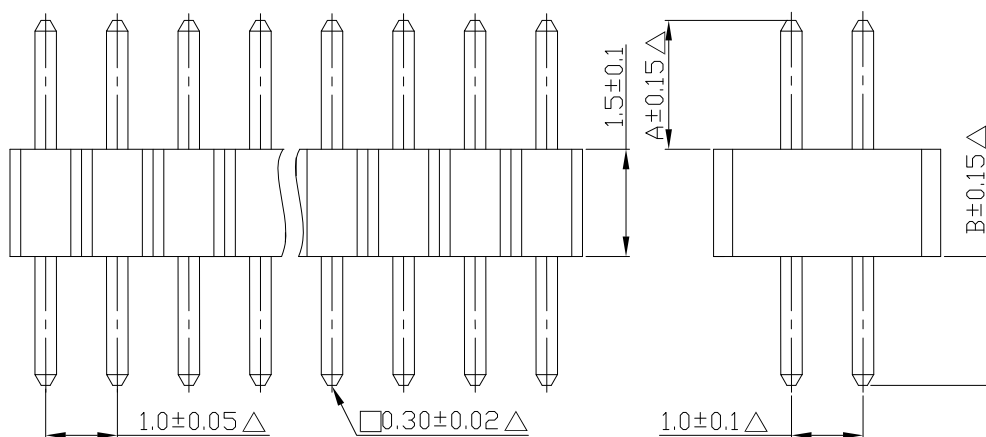

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P801	- X	X	X	A / B	X X
(Pin Header Dual Row) P801(H:1.5 W:3.17)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (020) B (015) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(2.0/1.5):

A: _____ B: _____



CHERNG WEEI

DESCRIPTION(内容):

1.0mm Pin Header H:1.5 180° □=0.30
Nylon-6T (RoHS)PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差).X
.XX
.XXX.XXXX
.X°
.XX°

SCALE(比例):

1:XX

REV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09