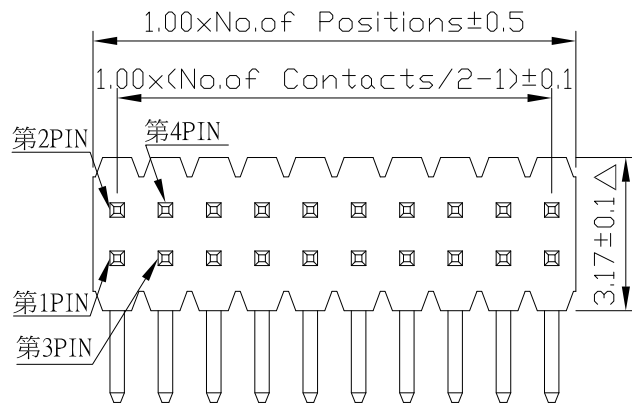


P.C.B Hole Layout

Specifications


Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P802	- X	X	X	A / B	X X
(Pin Header Dual Row) P802 (H:1.0 W:3.17)	R:Right Angle Type (Down Angle Type) R9:0.48mm :	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T (Standard:N)	A (020) B (019) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(2.0/1.9):

A:_____ B:_____

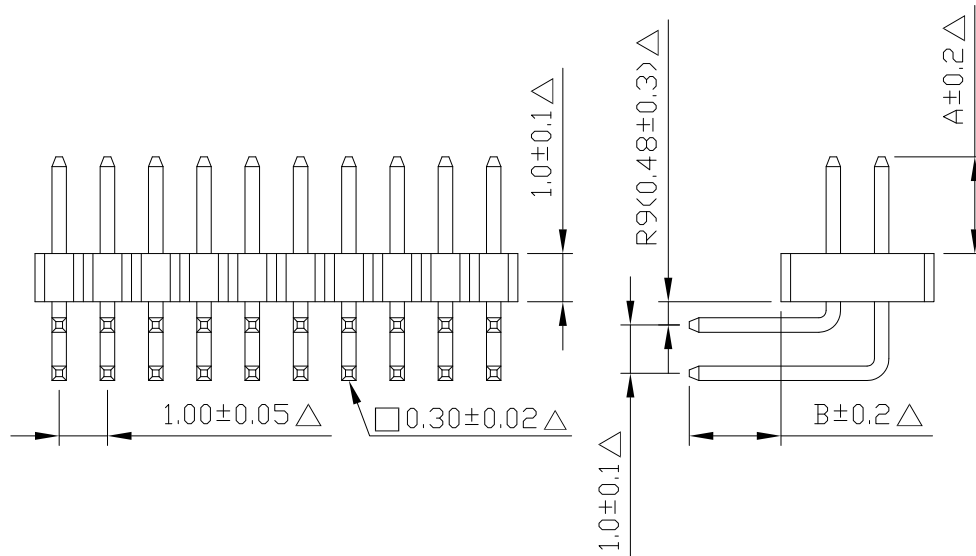

CHERNG WEEI

DESCRIPTION(内容):

1.0mm Pin Header H:1.0 90° □=0.30 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):

1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
X/X

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09