



A

B

C

D

E

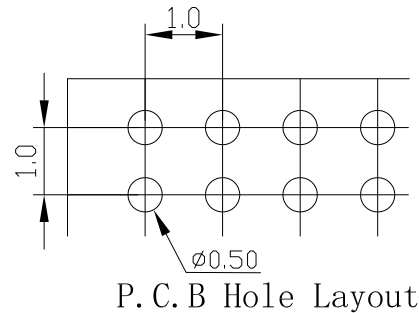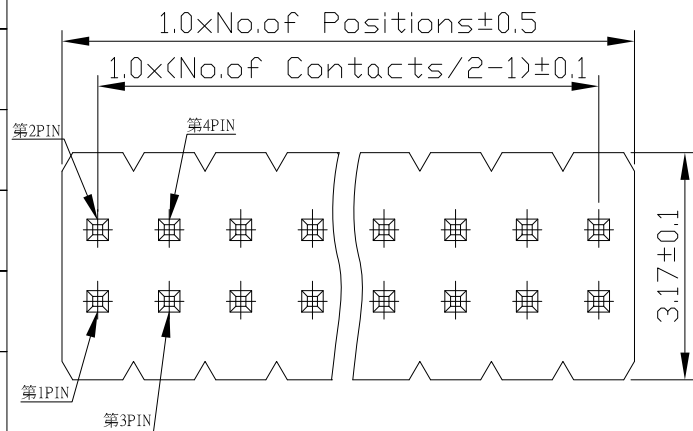

Specifications


Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:High Temperature Thermoplastic.UL 94V-0
Standard	:Nylon-6T
Finish	:Tin,Gold Plated
Standard	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P802	- X	X	X	A / B	X X
(Pin Header Dual Row) P802 (H:1.0 W:3.17)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (018) B (018) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(1.8/1.8):

A: _____ B: _____

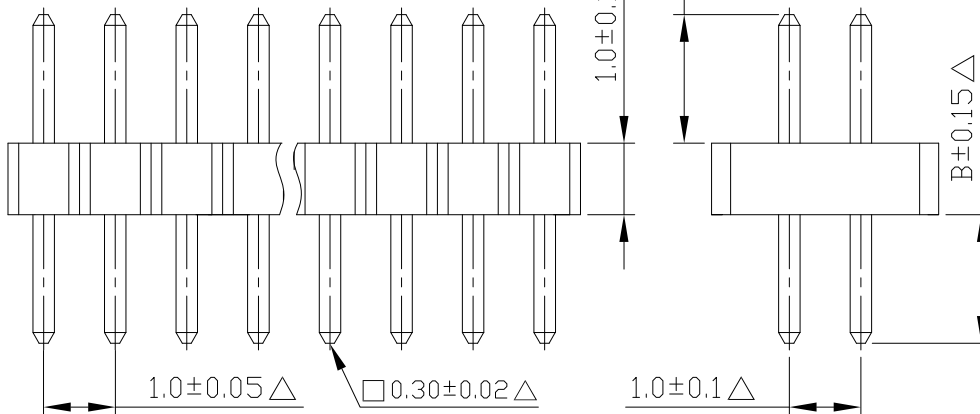

CHERNG WEEI

DESCRIPTION(内容)

1.0mm Pin Header H:1.0 180° □=0.30
Nylon-6T (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖)

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X
.XX
.XXX

SCALE(比例):
1:XX



REV:
R0

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E