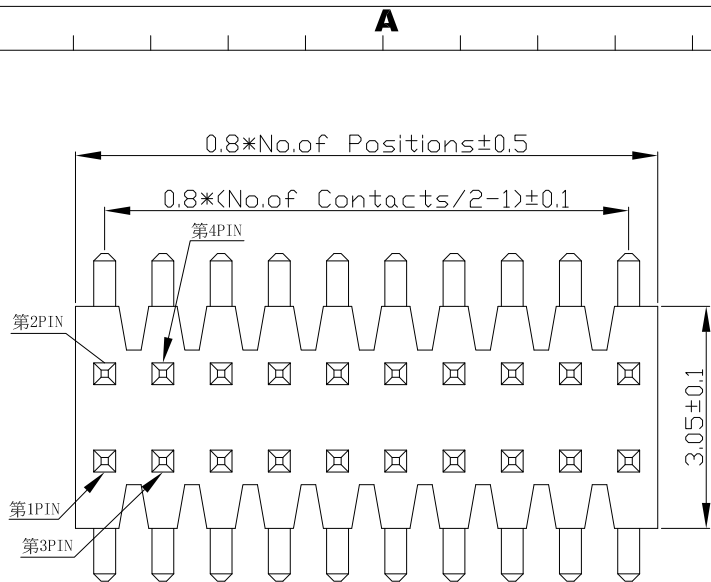



P. C. B Hole Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃~ +105℃
Soldering Temperature	:260℃ for 3~5s Max.
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic.UL 94V-0
Standard	:Nylon-6T
Finish	:Tin,Gold Plated
Standard	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P901	- X	X	X	A	X X
(Pin Header Dual Row) P901 (H:1.35 W:3.05 展開4.5)	M:SMT TYPE M6:0.50mm ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	A (020)	(08 TO 100 Contacts)
					(If you desire on other length,by marking put desired in the A)

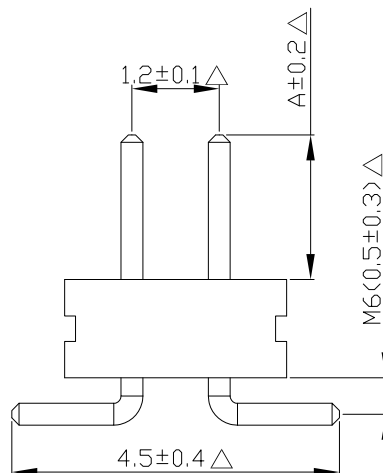

Dim(2.0):

A:_____



CHERNG WEEI

DESCRIPTION(内容):

0.8mm Pin Header H:1.35 SMT □=0.30
Nylon-6T,(RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):

1:XX



REV:
A/2

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09