
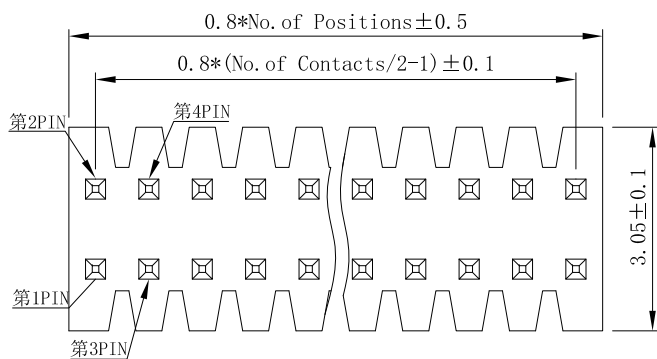
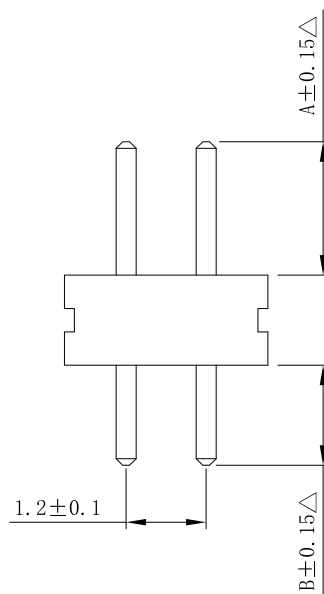


P. C. B Hold Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold Plated
Standard	:Gold Flash all over

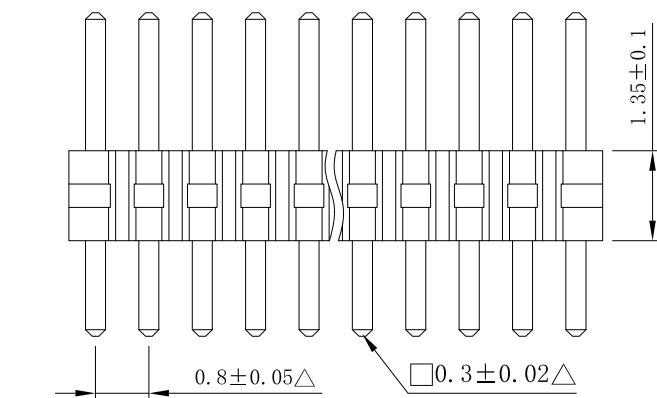

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P901	X	X	X	A / B	X X
(Pin Header Dual Row) P901 (H:1.35 W:3.05)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (020) B (015)	(04 TO 100 Contacts)
					(If you desire on other length, by marking put desired in the A/B)

Dim(2.0/1.5):

A: _____ B: _____



CHERNG WEEI

DESCRIPTION(内容):

0.8mm Pin Header H:1.35 180° □=0.30
Nylon-6T (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X
.XX
.XXX

.XXXX
.X°
.XX°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09