
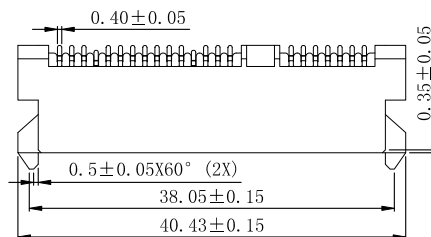
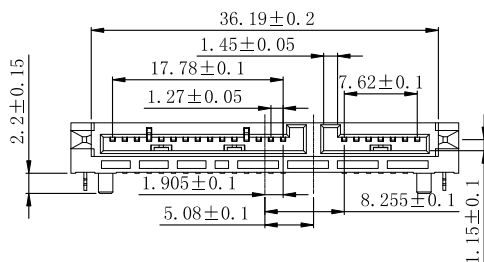
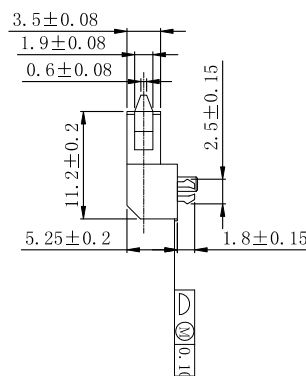


剖視圖 A-A

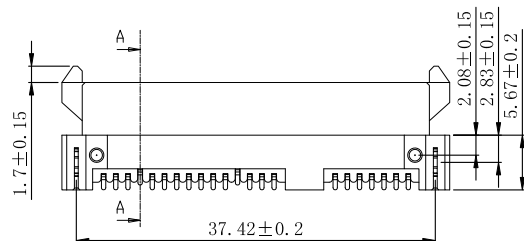

SPECIFICATIONS

ELECTRICAL

RATED CURRENT

:1.0 Amp

INSULATION RESISTANCE

:1000 MΩMin

CONTACT RESISTANCE

:30 MILLIOHMS MAX

DIELECTRIC WITHSTANDING VOLTAGE

:AC 500V FOR 1 MINUTE

OPERATING TEMPERATURE

: -40℃~+85℃

MECHANICAL

INSULATOR MATERIAL

:GLASS-FILLED
THERMOPLASTIC

COLOR

:BLACK (UL94V-0)

CONTACT MATERIAL

:PHOSPHOR BRONZE

BOARD LOCK

:BRASS

GOLD ON CONTACT AREA, TIN ON SOLDERING
AREA, ALL OVER NICKEL

Series	Connector Type	Number of Contacts	Material	Color	Contact Plating	Series
ST A	X	XX	X	-XX	-XX	X
A:A Series	M:SMT Type M3:5.25	(22 Contacts)	N:Nylon-6T C:LCP (Standard:C)	BK:Black BL:Blue GR:Green WH:White YE:Yellow	H1:-5μ" Min. Gold in contact area/ 100μ" Min. Tin in solder area/ H2:-Flash. Gold in contact area/ 100μ" Min. Tin in solder area/ H3:-10μ" Min. Gold in contact area/ 100μ" Min. Tin in solder area/ H4:-15μ" Min. Gold in contact area/ 100μ" Min. Tin in solder area/ H5:-30μ" Min. Gold in contact area/ 100μ" Min. Tin in solder area/	F:Female



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

SATA 15+7P SMT REVERSE TYPE
(環保材料)

PART NO:
(料號) STA-M322X-XX-HX-F

DWG NO(圖號):

DRAWN(製圖):
鄧文廣

CHECKED(確認):
鄧文廣

APPROVAL(核准):
鄧文廣

GENERAL TOLERANCE:
(公差)

.X ±0.20
.XX ±0.15
.XXX ±0.10

SCALE(比例):
1:XX



REV:
A/4

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

舊料號:CSP-09F122127M1B0

舊料號:STA-M22X-XX-HX-F

DATE

2007.11.17

2008.04.08

2008.09.25