


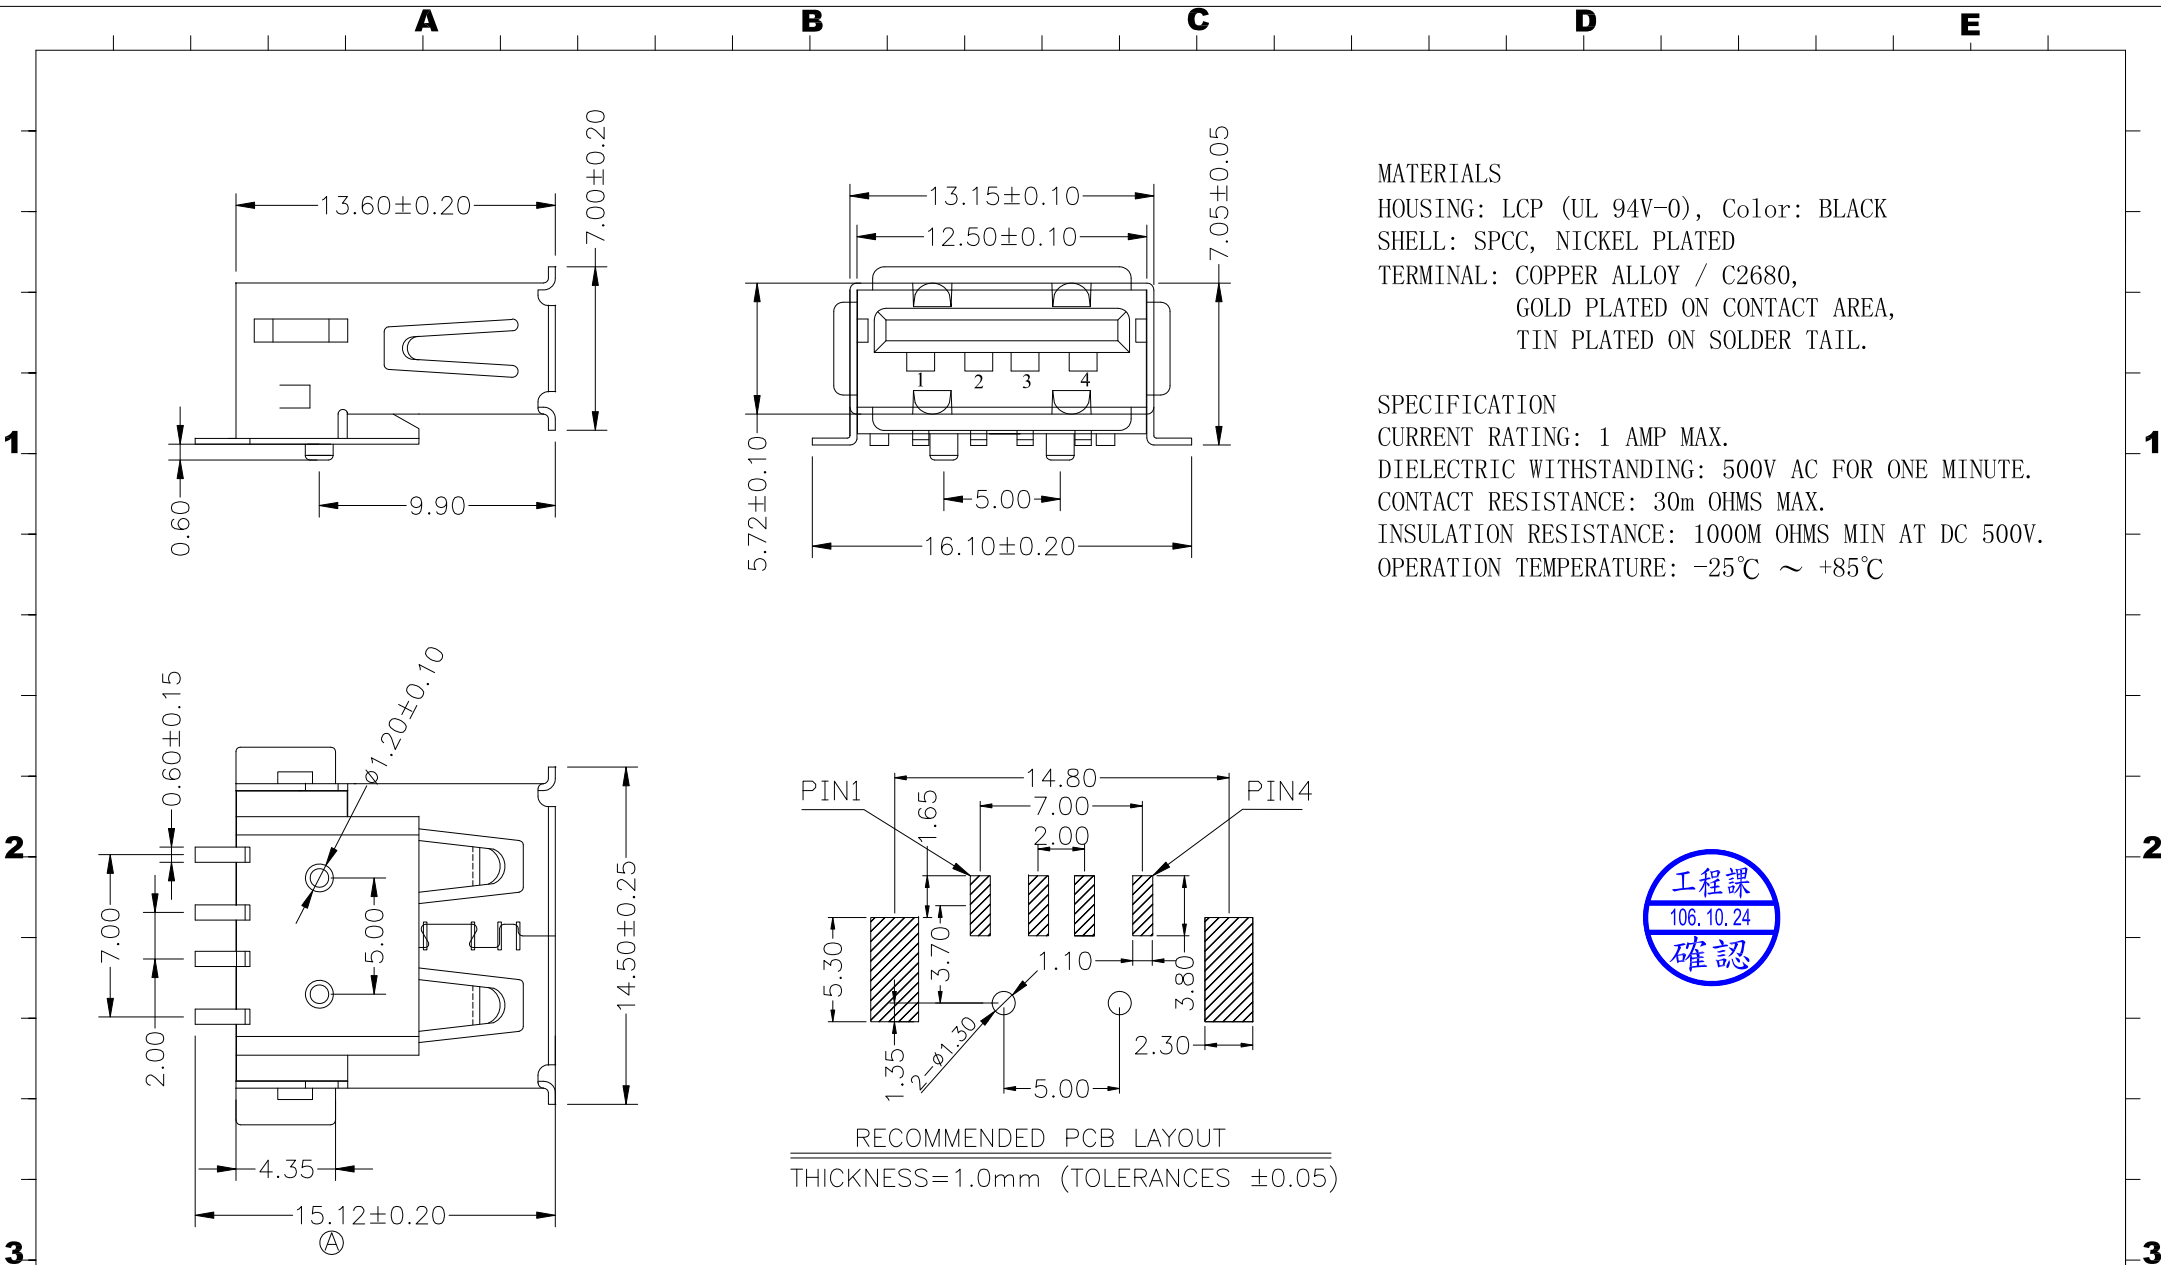

MATERIALS

HOUSING: LCP (UL 94V-0), Color: BLACK
SHELL: SPCC, NICKEL PLATED
TERMINAL: COPPER ALLOY / C2680,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.

SPECIFICATION

CURRENT RATING: 1 AMP MAX.
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE.
CONTACT RESISTANCE: 30m OHMS MAX.
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V.
OPERATION TEMPERATURE: -25°C ~ +85°C