
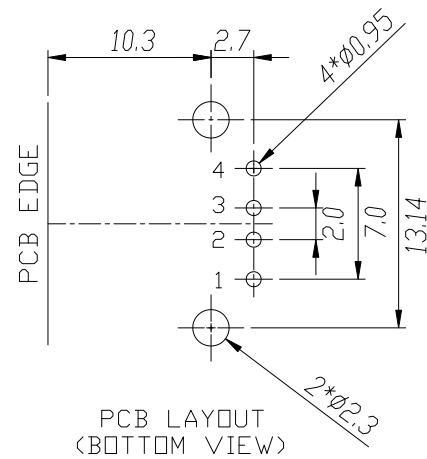
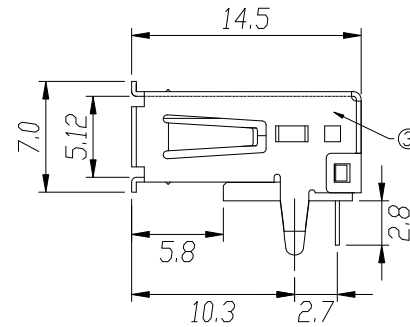


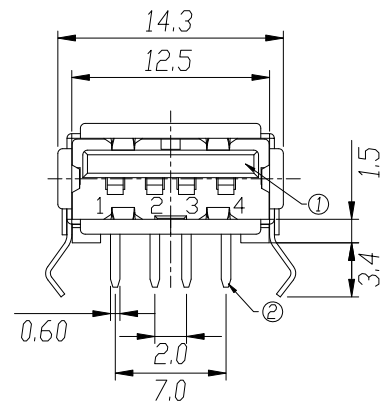

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute (Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.



N0.	NAME	MATERIAL	FINISH	REMARK	QTY
1	HOUSING	PBT G.F.	BLACK WHITE	P/N: UAF-041RGPB-CF254 P/N: UAF-041RGPW-CF254	1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold:1~3u"; NI:40~60u"; TIN:120u"	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:80~120u"	1



承洧科技股份有限公司
Cherrng Wee I Technology Corp.

DESCRIPTION(内容):

USB A TYPE FLAT 4 PIN DIP (RoHS)

PART NO:
(料 號) UAF-041RGPX-CF254

DWG NO(圖號):

DRAWN(製圖):

mimi

CHECKED(確認):

MAMDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差) X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料
2007年USB SERIES料號轉換
補充BLACK料號
外殼外觀變更

DATE

2006.09.06
2007.08.06
2007.11.29
2010.09.20