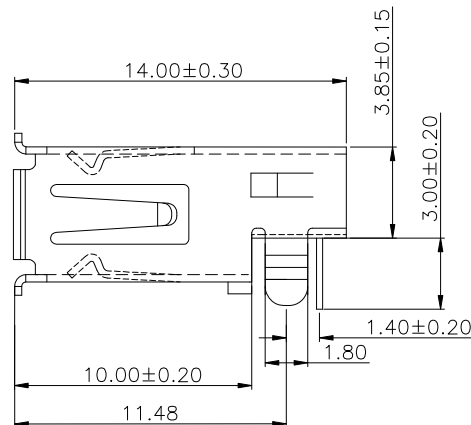
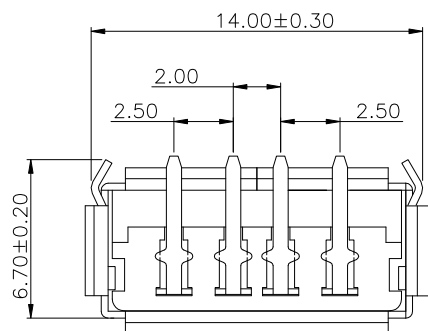
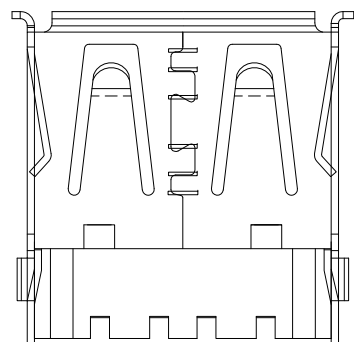
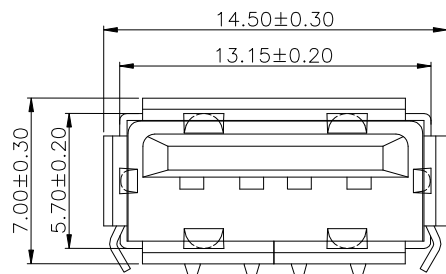


RECOMMENDED PCB LAYOUT
THICKNESS=1.0mm (TOLERANCES ± 0.05)

MATERIALS

HOUSING: HI-TEMP. PLASTIC PBT+30% G.F (UL 94V-0)
COLOR: BLACK or WHITE
SHELL: SPCC NICKEL PLATING
TERMINAL: COPPER ALLOY/C2680, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



PART NO.	COLOR
UAF-041RGPB5-CF1066	BLACK
UAF-041RGPW5-CF1066	WHITE

DESCRIPTION(内容):

USB A TYPE, METAL SHIELD,
RIGHT ANGLE, FEMALE, DIP
(RoHS)

PART NO:
(料 號) UAF-041RGPX5-CF1066

DWG NO(圖號): 22AEH-041T-21JL

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

.X ± 0.3
.XX ± 0.2

SCALE(比例):

FREE



REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

變更外殼材質(原:COPPER ALLOY)

DATE

2016.02.02

2016.03.09