


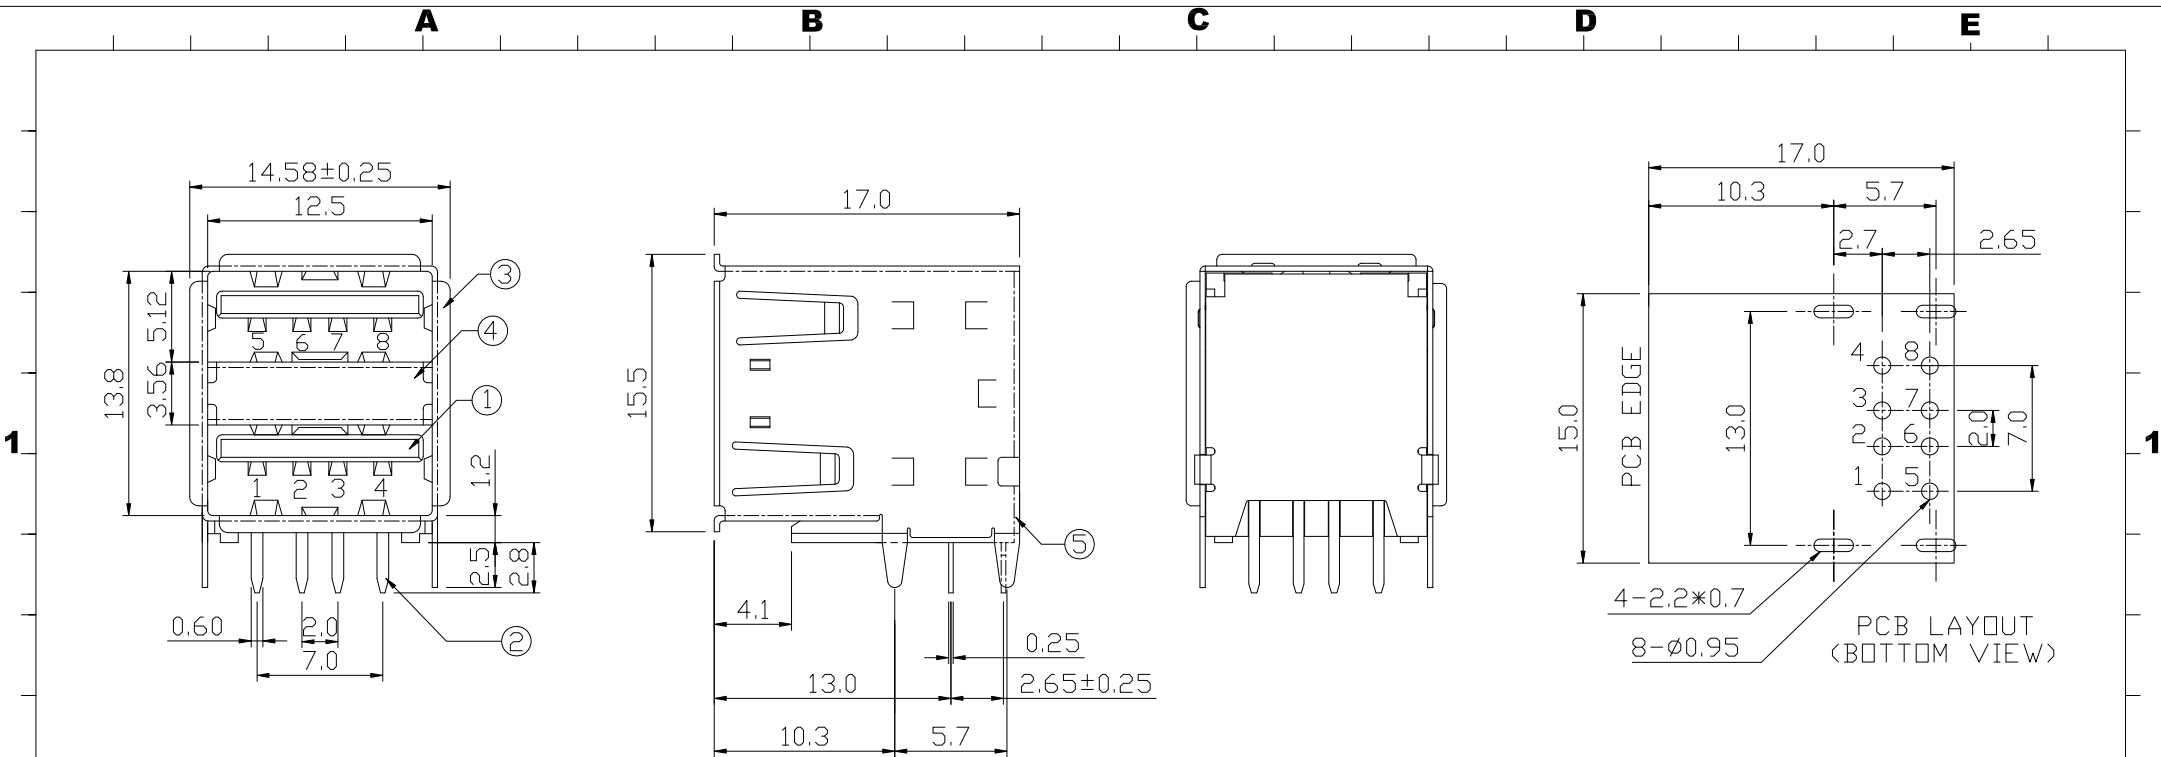

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZE	GOLD-TIN PLATED	8	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,0.3mm	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	STAINLESS,0.3mm	WITHOUT PLATED	1	
5	REAR SHELL	SPCC,0.3mm	NICKEL PLATED	1	NI:80~120u"

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:750V AC (rms) for 1 Minute(Rev. 1.1).

Durability (Life Test): 1500 Cycles.

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.



承洧科技股份有限公司
Chong Wei Technology Corp.

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
DUAL USB. TYPE A 90°(RoHS)		GONG		.X ±0.25		R0			
PART NO: UAF-042RGCBS-CF254		CHECKED(確認):		.XX ±0.15		UNIT: mm	R0		2017.03.13
DWG NO(圖號): KS-002-A3NBH (LCP)(8804 P2.5)-LH		TERESA		APPROVAL(核准):		SIZE: A4	R1		
		JOHNNY		SCALE(比例): FREE		SHEET: 1/1	R2		
							R3		