

A

B




C

D

E

1

1

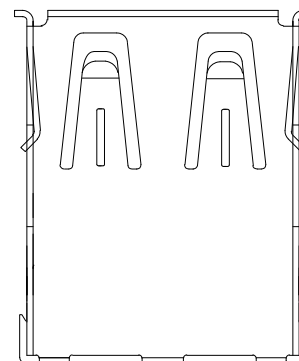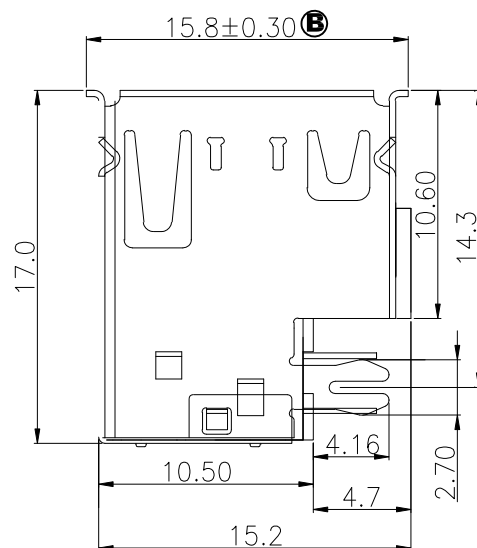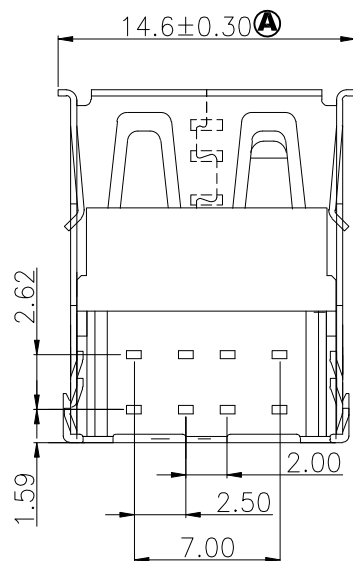

MATERIALS

HOUSING: THERMOPLASTIC PBT WITHE OR BLACK(UL 94V-0)
BACK COVER: THERMOPLASTIC PBT WITHE OR BLACK(UL 94V-0)
SHELL: SPCC-SD NICKEL PLATING
CLIP: SPCC-SD
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL




SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C



2

2

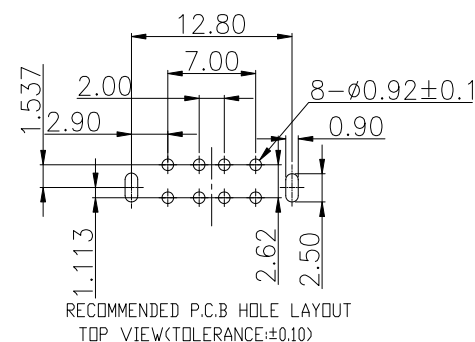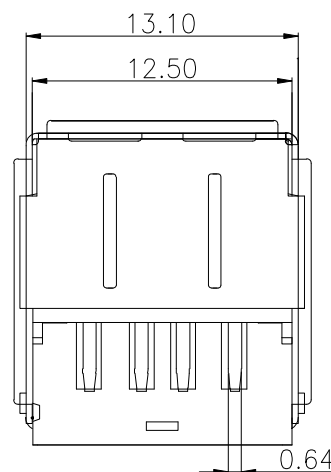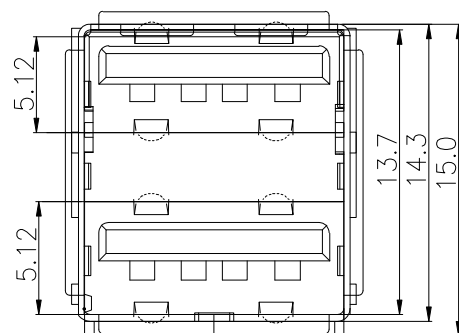

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
1	VBUS	5	VBUS
2	D-	6	D-
3	D+	7	D+
4	GND	8	GND
Shell	Shield		

3

3

PART NO.	COLOR
UAF-042RGPB3-CF1066	BLACK
UAF-042RGPW3-CF1066	WHITE



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

USB A TYPE, PCB MOUNT,
BOARD CUT, 90°, METAL SHIELD, FEMALE
(RoHS)

PART NO:
(料 號) UAF-042RGPX3-CF1066

DWG NO(圖號): 22CE-081T-115L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE

REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

變更(A)、(B)尺寸

DATE

2017.03.16

2017.04.05

A

B

C

D

E

CF1066