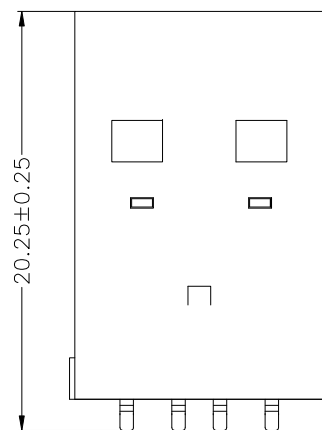
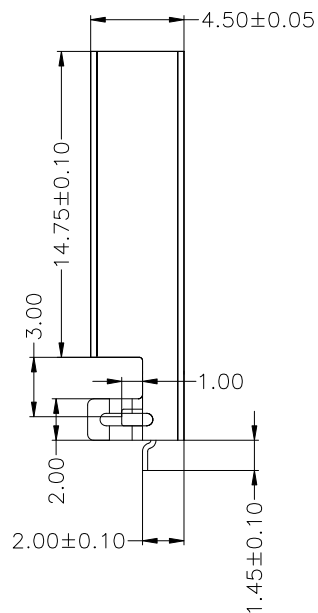
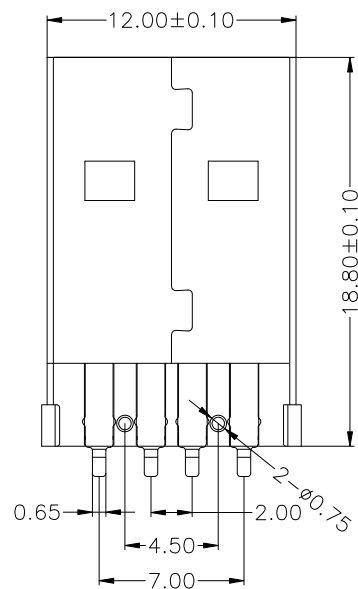


Recommended PCB Layout

## MATERIALS

HOUSING: LCP (UL 94V-0)

SHELL: SPCC, NICKEL PLATING

TERMINAL: COPPER ALLOY/C2680, GOLD PLATED ON CONTACT AREA  
TIN PLATING ON SOLDER TAIL

## SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C ~ +105°C



### DESCRIPTION(内容):

USB A TYPE, SMT BOARD CUT TYPE,  
METAL SHIELD, MALE (RoHS)

PART NO:  
(料 號) UAM-041MGCB2-CF1066

DWG NO(圖號): 22ADH-041T-21RL2

### DRAWN(製圖):

GONG

### CHECKED(確認):

TERESA

### APPROVAL(核准):

JOHNNY

### GENERAL TOLERANCE:

(公差)

.X ±0.3  
.XX ±0.2

### SCALE(比例):

FREE



### REV:

R1

### UNIT:

mm

### SIZE:

A4

### SHEET:

1/1

### REV

R0

R1

R2

R3

### DESCRIPTION

RELEASE

修改(A)尺寸公差(原:12.75±0.10)

### DATE

2015.06.10

2015.07.20